


Overview

HPE Solid State Disk Drives


(SSD, AICs, M.2s and M.2 EKits)

HPE Solid State Drives (SSDs), Add-In-Cards, M.2s and M.2 Enablement Kits (EKits) are based upon industry leading NAND Flash technology, which delivers exceptional performance and endurance to support a growing broad spectrum of demanding applications with varying workload performance requirements.

These storage devices offer better I/O latency & more power efficient solutions when compared with traditional rotating (HDD) media, while also fitting seamlessly into existing HPE server & storage infrastructures, and are available in a number of form factors including: Small Form Factor (SFF), Large Form Factor (LFF), Enterprise and Datacenter Standard Form Factor (EDSFF) E3.S, M.2, and PCIe/NVME Add-In-Cards (AIC).



M.2 Enablement Kit

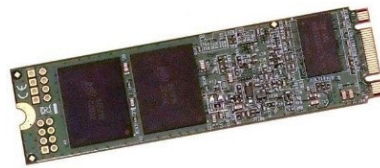

M.2



Smart Carrier M.2 (SCM)



PCIe Add-in-Card (AIC)



Smart Carrier NVMe (SCN)



Smart Carrier (SC)



Basic Carrier (BC)



Low Profile Converter (LPC)



E3.S Thin Carrier (EC1)

Overview

What's New?

- New Solid State Drives & Drive Option Kit(s):
 - P63871-B21 HPE 1.6TB SAS Mixed Use SFF BC Self-encrypting FIPS 140-3 PM7
 - P63875-B21 HPE 3.84TB SAS Read Intensive SFF BC Self-encrypting FIPS 140-3 PM7 SSD
 - P63886-B21 HPE 480GB SATA 6G Read Intensive SFF BC PM893a SSD
 - P63890-B21 HPE 480GB SATA 6G Read Intensive SFF SC PM893a SSD
 - P63910-B21 HPE 3.84TB SATA 6G Read Intensive SFF BC PM893a SSD
 - P63914-B21 HPE 3.84TB SATA 6G Read Intensive SFF SC PM893a SSD

HPE Solid State Drive Selector Tool

A web-based tool that dramatically reduces the time and complexity of selecting the right SSD for your demanding workloads.

<http://ssd.hpe.com>

Dramatically reduces the time to select the right SSD for your HPE Server

- Recommends the most appropriate SSDs for specific customer workloads
- Reduces selection time and eliminates complexity; sort by server model, price, & performance
- Ideal for customers, HPE Sales, and HPE channel partners
- Simple, web-based tool; user-friendly interface

Firmware Updates

HPE Digitally Signed Firmware Prevents unauthorized access to your data by providing the security and assurance that drive firmware comes from a trusted source and protects against malicious attacks. Digitally Signed Firmware is indicated by "DS" in the SKU description of older SKUs. All SSDs in the HPE main portfolio of SKU have digitally signed firmware unless otherwise noted, particularly in newer released SKU (even if DS does not appear in the description). Digitally Signed Firmware can be confirmed in the capacity/workload tables by SKU number.

For advanced data protection and encryption, customers should consider HPE Smart Array Controllers with HPE Smart Array Secure SR Encryption. It is a controller-based data encryption solution for HPE servers that protects data-at-rest on all SAS and SATA drives connected directly to the controller. This solution meets stringent compliance regulations such as HIPAA, FIPS, and Sarbanes-Oxley.

Minimally Supported Operating Systems for all SSDs

- Microsoft Windows 2012 Server (x64) R2
 - Microsoft Windows 2016 (RTM)
 - Red Hat Enterprise Linux 6 (EM64T/AMD64)
 - Red Hat Enterprise Linux 7 (EM64T/AMD64)
 - SLES 11 (EM64T/AMD64) (includes XEN)
 - SLES 12 (EM64T/AMD64) (includes XEN)
 - VMware ESXi 6.0
-

Overview

Our Solid State product categories include Solid State Drives, or SSDs

We define enterprise-class as products that include full data path error detection and surprise power loss protection. In addition, our SSDs have HPE SmartSSD Wear Gauge support, which provides diagnostic information and reports on the health of any given drive.

HPE Enterprise SSDs are available in three categories based on the customer's application and workload level: Read Intensive (RI), Mixed Use (MU), and Write Intensive (WI). These categories indicate the number of drive writes per day (DWPD) that you can expect from the drive. (DWPD is the maximum number of 4K host writes to the entire drive capacity of the SSD per day over a five-year period).

Workloads such as Read caching, Web Servers, Social Media, and Boot are more Read Performance driven. Workloads such as Business Intelligence, Big Data Analytics, Virtualization tend to be more Write Performance driven.

Our Read Intensive SSDs are typically focused on Read Performance with an Endurance less than or equal to 1 full drive write per day. Our Write Intensive SSDs are focused on Write Performance with an Endurance of ≥ 10 full drive writes per day (DWPD). As an example, if we have an 800GB Write Intensive SSD with an endurance of 10 Drive Writes per Day, it means that customers can write to the entire 800GB capacity of that SSD 10 times per day, and the drive will last for 5 years. Positioned in-between RI and WI, we have products with Balanced Read and Write Performance that we call Mixed Use (MU), with an Endurance of typically ~ 3 DWPD.

For best access to SSDs, HPE has enhanced its extensive SSD portfolio with a multi-vendor offering. HPE multi-vendor portfolio utilizes specific vendor SSDs which are HPE qualified and released and are then bundled into a multi-sourced SKU per capacity. Identified by Multi Vendor (MV) in the SKU description, these multi-vendor SKUs provide the shortest lead time SSDs, preferable pricing to single sourced SKUs and are assured to meet or exceed the minimum performance specifications and power requirements published in this HPE QuickSpecs document per capacity SKU number.

HPE's multi-vendor SSD offering helps customers simplify their purchasing decisions by providing immediate availability, preferable pricing and SKU longevity on HPE certified SSDs.

HPE SATA SSDs deliver enterprise features at an affordable price in HPE servers. Entry-level pricing is fueling the rapid adoption of SSDs for read-intensive workloads, with the cost per IOPS comparing favorably to HDDs.

For customers looking to step up from SATA SSDs, HPE single-port Value SAS SSDs offer a significant performance boost over SATA SSDs with roughly twice the IOPS, and are typically lower in cost than traditional SAS SSD drives.

HPE full-performance SAS SSDs allow greater I/O bandwidth for superior performance over Value SAS SSDs, providing high write performance and endurance. They are best suited for mission-critical enterprise environments with workloads high in read and writes.

For customers looking for even more performance, HPE offers a portfolio of NVMe SSDs. HPE Mainstream Performance NVMe SSDs are advanced data center drives optimized for greater performance and endurance in a cost-effective design. HPE High Performance NVMe SSDs are positioned to deliver high performance and low latency. HPE High Performance Low Latency NVMe SSDs are a category of drives that offers a combination of high throughput, low latency, and ultra-high endurance. The first HPE SSDs using 3D XPoint technology*, these SSDs are optimized to break through data access bottlenecks by providing a new data storage tier. High Performance Low Latency NVMe SSDs accelerate applications for fast caching and fast storage to increase scale per server and reduce transaction costs for latency sensitive workloads.

Using the above information along with our **HPE SSD Selector Tool** at <http://ssd.hpe.com> you can quickly determine what SSD solution might best meet your needs. You can also compare specific capacity, performance attributes, and server compatibility.



Overview

XXXXXX-B21 is SKU designation formed by a common six digit part number that identifies a SKU that is offered from COMPUTE but also available across multiple server family lines. Refer to the table below to find the SKU suffix that applies to the specific server product line this option can be ordered with.

-B21	-H21	-K21
COMPUTE Server Line	SPECIALIZED COMPUTE Server Line	STORAGE Line
HPE Cloudline CL2600/CL2800/CL3100/CL4100/CL5800 Servers HPE ProLiant DL20/DL160/DL180 Servers HPE ProLiant DL320/DL325/DL345/DL360/DL365/DL380/DL385/DL560/DL580 Servers HPE ProLiant MicroServer HPE ProLiant ML30/ML110/ML350 Servers HPE Synergy 480/660 Systems	HPE Apollo 35/40/70 Systems HPE Apollo 2000/6000 Servers HPE XL170r/XL190r/XL270d (Apollo 6500) Gen10 Server for BlueData Software HPE Converged System 300/500/700/750 HPE Edgeline Systems and Servers HPE Integrity BL860c i6/BL870c i6/BL890c i6 Server Blades HPE Integrity MC990 X Server HPE Integrity rx2800 i6 Server HPE Integrity Superdome HPE SGI 8600 System HPE Solutions for SAP HANA (TDI)	HPE Apollo 4000 Systems HPE Alletra 4000 Server HPE D3000 Disk Enclosures HPE SimpliVity 2600 HPE SimpliVity 325/380 Gen10 HPE Storage File Controllers HPE StoreEasy 1460/1660/1860

Disclaimer: This may not be a complete listing of applicable servers



Standard Features

What is SSD?

An enduring data storage device utilizing NAND (negative-AND) semiconductor technology to store and access data which is volatile without the aid of an auxiliary power source.

SSD Quality

Today's businesses are seeing larger, more complex applications, coupled with an increasing amount of mission-critical and transaction processing data demand. In this environment, storage has become a critical component, significantly defining requirements for both systems reliability and performance. This is why HPE drives undergo a rigorous qualification process to ensure functionality and eliminate firmware and O/S incompatibilities.

Integration

Many issues customers have with third party drives are "simple" integration issues. When buying from another supplier, there is no guarantee that a drive has been correctly set for proper operation with ProLiant servers and storage systems. These incompatibilities can create problems in configuration, can rob your system of performance, or at their worst, can cause you to lose data. HPE drives are specifically designed and tested for flawless operation in your HPE equipment. The integration of solid state drives in HPE systems means that associated components are right for your ProLiant server.

Support Matrix

Please see the following URL for the latest list of supported servers and enclosures:

<https://www.hpe.com/us/en/servers.html>

Notes: Non-hot plug devices are 15mm Z-height, which restricts them to those servers that can accept a 15mm device.

Product Category

HPE Enterprise SSDs are available in three categories based on workload level: Read Intensive (RI), Mixed Use (MU), and Write Intensive (WI). The categories indicate the number of drive writes per day (DWPD1) that you can expect from the drive. (DWPD1 is the maximum number of 4K host writes to the entire drive capacity of the SSD per day over a five-year period.

Maximum Usage Limitations

NAND Flash devices use semiconductor technology that has a finite number of data that can be written to the device, defined as the Maximum Usage Limit, commonly called "Write Endurance". Write Endurance - is measured while running 100% random 4KiB writes across the entire SSD.

Drive Writes Per Day (DWPD) - Workload environment is based on 100% random 4KiB writes for five (5) years, which is the maximum amount of data that can be written to the device before reaching the device's write endurance limit.

HPE Solid State Drives (SSDs) are equipped with tools that can report the amount of lifetime remaining. Introducing HPE SMARTSSD Wear Gauge™. To take advantage of SMARTSSD Wear Gauge™, Smart Array Firmware version 5.0 or greater is required and HPE Array Configuration Utility (ACU) or HPE Diagnostic Utility (ADU) must be running.

Simple Network Management Protocol (SNMP) Storage Agents for both Microsoft® Windows® and Linux provide status and condition updates through traps, OS event logs and the HPE System Management Homepage:

<https://www.hpe.com/us/en/product-catalog/detail/pip.hp-system-management-homepage-software.344313.html>

The HPE SMARTSSD Wear Gauge™ requires a Smart Array or Smart HBA controller listed below.



Standard Features

Standard Features

- HPE Smart Array PX1X Controller Series or newer
- HPE Smart HBA PX4X Controller Series
- HPE Dynamic Smart Array BX2Xi Controller Series or newer
- HPE Dynamic Smart Array B320i Controller

Notes: HPE Direct Connect to the HPE Smart Array B110i SATA RAID Controller is not currently supported by the above noted tool.

Data Retention

Data Retention is the period of time for retaining the data in the NAND once the maximum rated endurance level has occurred. These SSD's are rated for 3 months if no power is applied once the SSD has reached maximum rated write endurance.

Warranty

SSD & AIC Standard 3/0/0 warranty; Customer Self Repair (CSR) subject to maximum usage limitations. Maximum usage limit: This is the maximum amount of data that can be written to the drive. Drives that have reached this limit will not be eligible for warranty coverage.

Notes: In cases where an M.2 SSD is used in conjunction with a Server Cartridge the Warranty includes 3-Year Parts, 3-Year Labor, 3-Year (3/3/3) Onsite support for that option only.



Technical Specifications

SATA Capacity, Workload and Carrier Specifications

SATA Interface– (Capacity, Workload, Carrier...)

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed	Flash Type	Port	Server Gen Supported (Select Platforms)
Mixed Use SATA Drives											
P44011-B21	HPE 480GB SATA 6G Mixed Use SFF BC PM897 SSD	480	MU	SATA	SFF	Hot Plug	BC	Yes	TLC	SP	Gen10 Plus
P44012-B21	HPE 960GB SATA 6G Mixed Use SFF BC PM897 SSD	960	MU	SATA	SFF	Hot Plug	BC	Yes	TLC	SP	Gen10 Plus
P44013-B21	HPE 1.92TB SATA 6G Mixed Use SFF BC PM897 SSD	1,920	MU	SATA	SFF	Hot Plug	BC	Yes	TLC	SP	Gen10 Plus
P47814-B21	HPE 480GB SATA 6G Mixed Use SFF SC PM897 SSD	480	MU	SATA	SFF	Hot Plug	SC	Yes	TLC	SP	Gen10 Plus
P47815-B21	HPE 960GB SATA 6G Mixed Use SFF SC PM897 SSD	960	MU	SATA	SFF	Hot Plug	SC	Yes	TLC	SP	Gen10 Plus
P47816-B21	HPE 1.92TB SATA 6G Mixed Use SFF SC PM897 SSD	1,920	MU	SATA	SFF	Hot Plug	SC	Yes	TLC	SP	Gen10 Plus
Mixed Use SATA Self-Encrypting Drives (SED)											
P58244-B21	HPE 960GB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	960	MU	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10,10 Plus,11
P58248-B21	HPE 1.92TB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	1,920	MU	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10,10 Plus,11
Read Intensive SATA Drives											
P44007-B21	HPE 480GB SATA 6G Read Intensive SFF BC PM893 SSD	480	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P44008-B21	HPE 960GB SATA 6G Read Intensive SFF BC PM893 SSD	960	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P44009-B21	HPE 1.92TB SATA 6G Read Intensive SFF BC PM893 SSD	1,920	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P44010-B21	HPE 3.84TB SATA 6G Read Intensive SFF BC PM893 SSD	3,840	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P47810-B21	HPE 480GB SATA 6G Read Intensive SFF SC PM893 SSD	480	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10 Plus
P47811-B21	HPE 960GB SATA 6G Read Intensive SFF SC PM893 SSD	960	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10 Plus
P47812-B21	HPE 1.9TB SATA 6G Read Intensive SFF SC PM893 SSD	1,920	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10 Plus
P47813-B21	HPE 3.84TB SATA 6G Read Intensive SFF SC PM893 SSD	3,840	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10 Plus
P63886-B21	HPE 480GB SATA 6G Read Intensive SFF BC PM893a SSD	480	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus,11
P63890-B21	HPE 480GB SATA 6G Read Intensive SFF SC PM893a SSD	480	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10 Plus
P63910-B21	HPE 3.84TB SATA 6G Read Intensive SFF BC PM893a SSD	3,840	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus,11
P63914-B21	HPE 3.84TB SATA 6G Read Intensive SFF SC PM893a SSD	3,840	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10 Plus



Technical Specifications

SATA Interface– (Capacity, Workload, Carrier...)

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed	Flash Type	Port	Server Gen Supported (Select Platforms)
Read Intensive SATA Self-Encrypting Drives (SED)											
P58236-B21	HPE 480GB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	480	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10,10 Plus,11
P58240-B21	HPE 1.92TB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	1,920	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10,10 Plus,11

Very Read Optimized SATA Drives

P58228-B21	HPE 7.68TB SATA 6G Very Read Optimized SFF BC 5400 SSD	7,680	VRO	SATA VRO	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10, 10 Plus, 11
P58232-B21	HPE 7.68TB SATA 6G Very Read Optimized LFF LPC 5400 SSD	7,680	VRO	SATA VRO	SFF	Hot Plug	LPC	Yes	TLC	Single	Gen10, 10 Plus, 11

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.

SATA Speeds and Feeds Specifications

SATA Interface – (Speeds & Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
Mixed Use SATA Drives							
P44011-B21	HPE 480GB SATA 6G Mixed Use SFF BC PM897 SSD	2628	3	535 / 495	108 / 37	66,000 / 52,000	76,000@Q32 / 52,500@Q16
P44012-B21	HPE 960GB SATA 6G Mixed Use SFF BC PM897 SSD	5256	3	535 / 495	108 / 39	66,000 / 52,000	76,000@Q32 / 52,500@Q16
P44013-B21	HPE 1.92TB SATA 6G Mixed Use SFF BC PM897 SSD	10,512	3	535 / 495	108 / 38	65,000 / 52,000	76,000@Q32 / 52,500@Q16
P47814-B21	HPE 480GB SATA 6G Mixed Use SFF SC PM897 SSD	2628	3	535 / 495	108 / 37	66,000 / 52,000	76,000@Q32 / 52,500@Q16
P47815-B21	HPE 960GB SATA 6G Mixed Use SFF SC PM897 SSD	5256	3	535 / 495	108 / 39	66,000 / 52,000	76,000@Q32 / 52,500@Q16
P47816-B21	HPE 1.92TB SATA 6G Mixed Use SFF SC PM897 SSD	10,512	3	535 / 495	108 / 38	65,000 / 52,000	76,000@Q32 / 52,500@Q16
Mixed Use SATA Self-Encrypting Drives (SED)							



Technical Specifications

SATA Interface – (Speeds & Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
P58244-B21	HPE 960GB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	8,760	5.00	516 / 494	111 / 37	71,652 / 52,194	76,811@32 / 53,103@4
P58248-B21	HPE 1.92TB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	17,520	5.00	516 / 493	111 / 37	70,786 / 52,238	78,227@Q256 / 53,217@Q4

Read Intensive SATA Drives

P44007-B21	HPE 480GB SATA 6G Read Intensive SFF BC PM893 SSD	876	1.00	535 / 495	97 / 37	68,000 / 29,000	77,000@Q32 / 29,000@Q4
P44008-B21	HPE 960GB SATA 6G Read Intensive SFF BC PM893 SSD	1,752	1.00	535 / 495	97 / 39	68,000 / 31,000	77,000@Q32 / 31,000@Q4
P44009-B21	HPE 1.92TB SATA 6G Read Intensive SFF BC PM893 SSD	3,504	1.00	535 / 495	108 / 39	66,000 / 32,000	75,000@Q32 / 32,000@Q4
P44010-B21	HPE 3.84TB SATA 6G Read Intensive SFF BC PM893 SSD	7,008	1.00	535 / 495	108 / 39	65,000 / 32,000	75,000@Q32 / 32,000@Q4
P47810-B21	HPE 480GB SATA 6G Read Intensive SFF SC PM893 SSD	876	1.00	535 / 495	97 / 37	68,000 / 29,000	77,000@Q32 / 29,000@Q4
P47811-B21	HPE 960GB SATA 6G Read Intensive SFF SC PM893 SSD	1752	1.00	535 / 495	97 / 39	68,000 / 31,000	77,000@Q32 / 31,000@Q4
P47812-B21	HPE 1.9TB SATA 6G Read Intensive SFF SC PM893 SSD	3,504	1.00	535 / 495	108 / 39	66,000 / 32,000	75,000@Q32 / 32,000@Q4
P47813-B21	HPE 3.84TB SATA 6G Read Intensive SFF SC PM893 SSD	7008	1.00	535 / 495	108 / 39	65,000 / 32,000	75,000@Q32 / 32,000@Q4
P63886-B21	HPE 480GB SATA 6G Read Intensive SFF BC PM893a SSD	876	1.00	536 / 371	114 / 54	71,359 / 18,340	78,779@Q32 / 18,634@Q4
P63890-B21	HPE 480GB SATA 6G Read Intensive SFF SC PM893a SSD	876	1.00	536 / 371	114 / 54	71,359 / 18,340	78,779@Q32 / 18,634@Q4
P63910-B21	HPE 3.84TB SATA 6G Read Intensive SFF BC PM893a SSD	7,008	1.00	536 / 499	114 / 39	64,677 / 32,460	73,629@Q32 / 32,729@Q4
P63914-B21	HPE 3.84TB SATA 6G Read Intensive SFF SC PM893a SSD	7,008	1.00	536 / 499	114 / 39	64,677 / 32,460	73,629@Q32 / 32,729@Q4

Read Intensive SATA Self-Encrypting Drives (SED)

P58236-B21	HPE 480GB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	1,324	1.50	515 / 449	111 / 38	73,183 / 45,284	79,702@128 / 47,820@4
P58240-B21	HPE 1.92TB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	5,256	1.50	519 / 495	111 / 38	71,031 / 33,182	78,175@64 / 33,930@256

Very Read Optimized SATA Drives

P58228-B21	HPE 7.68TB SATA 6G Very Read Optimized SFF BC 5400 SSD	9110	0.65	510 / 492	113 / 97	72,273 / 10,444	78,868@64 / 10,502@32
P58232-B21	HPE 7.68TB SATA 6G Very Read Optimized LFF LPC 5400 SSD	9110	0.65	510 / 492	113 / 97	72,273 / 10,444	78,868@64 / 10,502@32



Technical Specifications

SATA Power and Height Specifications

SATA Interface – (Power & Height)

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z-Height
Read Intensive SATA Drives									
P63886-B21	HPE 480GB SATA 6G Read Intensive SFF BC PM893a SSD	1.23	2.70	2.70	2.24	2.78	2.70	2.70	7mm
P63890-B21	HPE 480GB SATA 6G Read Intensive SFF SC PM893a SSD	1.23	2.70	2.70	2.24	2.78	2.70	2.70	7mm
P63910-B21	HPE 3.84TB SATA 6G Read Intensive SFF BC PM893a SSD	1.11	3.42	3.42	2.38	3.47	3.42	3.47	7mm
P63914-B21	HPE 3.84TB SATA 6G Read Intensive SFF SC PM893a SSD	1.11	3.42	3.42	2.38	3.47	3.42	3.47	7mm
Mixed Use SATA Self-Encrypting Drives (SED)									
P58244-B21	HPE 960GB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	1.5	3.9	3.9	3.1	4.1	2.15	4.1	7mm
P58248-B21	HPE 1.92TB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	1.5	3.9	3.9	3.05	4	2.15	4	7mm
Read Intensive SATA Self-Encrypting Drives (SED)									
P58236-B21	HPE 480GB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	1.5	3.5	3.5	3.15	3.75	2.15	3.75	7mm
P58240-B21	HPE 1.92TB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	1.5	4.1	4.1	3.1	4	2.25	4.1	7mm
Very Read Optimized SATA Drives									
P58228-B21	HPE 7.68TB SATA 6G Very Read Optimized SFF BC 5400 SSD	1.5	5	5	3.15	4.35	3.15	5	7mm
P58232-B21	HPE 7.68TB SATA 6G Very Read Optimized LFF LPC 5400 SSD	1.5	5	5	3.15	4.35	3.15	5	7mm

SATA Certifications

- Prequalified certification will be listed in the HPE Selector Tool <http://ssd.hpe.com/>.
- For latest VMware Compatibility, please visit <https://www.vmware.com/resources/compatibility/search.php> and enter specific HPE Model Number to confirm compatibility.
- For latest Windows OS Certification and SDDC (Software Defined Data Center) Premium AQ Certification please visit <https://www.windowsservercatalog.com/> and enter specific HPE Model Number to confirm compatibility.



Technical Specifications

SATA Capacity, Workload, Carrier Specifications MULTI VENDOR

SATA Interface– (Capacity, Workload, Carrier...) MULTI VENDOR

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed Firmware (DS)	Flash Type	Port	Server Gen Supported (Select Platforms)
Mixed Use Multi Vendor SATA Drives											
P18432-X21	HPE 480GB SATA 6G Mixed Use SFF SC Multi Vendor SSD	480	MU	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P18434-X21	HPE 960GB SATA 6G Mixed Use SFF SC Multi Vendor SSD	960	MU	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P18436-X21	HPE 1.92TB SATA 6G Mixed Use SFF SC Multi Vendor SSD	1,920	MU	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P18438-X21	HPE 3.84TB SATA 6G Mixed Use SFF SC Multi Vendor SSD	3,840	MU	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P40502-B21	HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	480	MU	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40503-B21	HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	960	MU	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40504-B21	HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	1,920	MU	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40505-B21	HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	3,840	MU	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P47419-B21	HPE 960GB SATA 6G Mixed Use LFF SCC Multi Vendor SSD	960	MU	SATA	LFF	Hot Plug	SCC	Yes	TLC	Single	Gen10,10 Plus
Read Intensive Multi Vendor SATA Drives											
P18420-X21	HPE 240GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	240	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P18422-X21	HPE 480GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	480	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P18424-X21	HPE 960GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	960	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P18426-X21	HPE 1.92TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	1,920	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus



Technical Specifications

SATA Capacity, Workload, Carrier Specifications MULTI VENDOR

SATA Interface– (Capacity, Workload, Carrier...) MULTI VENDOR

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed Firmware (DS)	Flash Type	Port	Server Gen Supported (Select Platforms)
Mixed Use Multi Vendor SATA Drives											
P18428-X21	HPE 3.84TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	3,840	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P18430-X21	HPE 7.68TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	7,680	RI	SATA	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P40496-B21	HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	240	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40497-B21	HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	480	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40498-B21	HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	960	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40499-B21	HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	1,920	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40500-B21	HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	3,840	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40501-B21	HPE 7.68TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	7,680	RI	SATA	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P47807-B21	HPE 480GB SATA 6G Read Intensive LFF SCC Multi Vendor SSD	480	RI	SATA	LFF	Hot Plug	SCC	Yes	TLC	Single	Gen10,10 Plus
P47808-B21	HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD	960	RI	SATA	LFF	Hot Plug	LPC	Yes	TLC	Single	Gen10,10 Plus
P65272-B21	HPE 480GB SATA 6G Read Intensive SFF RW Multi Vendor SSD	480	RI	SATA	SFF	Non Hot Plug	RW	Yes	TLC	Single	Gen10,10 Plus, 11

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.
- Multi-vendor SKUs are composed of numerous vendor manufactured SSDs within a given SATA capacity SKU. When ordering a particular SKU-B21 number the customer will receive a homogenous set of vendor manufactured SSDs in that capacity that has met or exceeds the HPE qualification standards published above.



Technical Specifications

SATA Speeds and Feeds Specifications MULTI VENDOR

SATA Interface – (Speeds & Feeds) MULTI VENDOR

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
Mixed Use Multi Vendor SATA Drives							
P18432-X21	HPE 480GB SATA 6G Mixed Use SFF SC Multi Vendor SSD	2,628	3.0	510 / 430	125 / 52	62,000 / 29,000	72,000@Q32 / 29,000@Q4
P18434-X21	HPE 960GB SATA 6G Mixed Use SFF SC Multi Vendor SSD	5,256	3.0	516 / 480	125 / 50	61,000 / 31,000	72,000@Q32 / 31,000@Q4
P18436-X21	HPE 1.92TB SATA 6G Mixed Use SFF SC Multi Vendor SSD	10,000	3.0	516 / 480	125 / 52	59,000 / 31,000	71,000@Q32 / 31,000@Q4
P18438-X21	HPE 3.84TB SATA 6G Mixed Use SFF SC Multi Vendor SSD	21,024	3.0	512 / 480	140 / 76	59,000 / 32,000	69,000@Q32 / 32,500@Q32
P40502-B21	HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	2,628	3.0	510 / 430	125 / 52	62,000 / 29,000	72,000@Q32 / 29,000@Q4
P40503-B21	HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	5,256	3.0	516 / 480	125 / 50	61,000 / 31,000	72,000@Q32 / 31,000@Q4
P40504-B21	HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	10,000	3.0	516 / 480	125 / 52	59,000 / 31,000	71,000@Q32 / 31,000@Q4
P40505-B21	HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	21,024	3.0	510 / 480	140 / 76	59,000 / 32,000	70,000@Q32 / 35,000@Q4
P47419-B21	HPE 960GB SATA 6G Mixed Use LFF SCC Multi Vendor SSD	6,000	3.5	516 / 480	125 / 50	61,000 / 31,000	72,000@Q32 / 31,000@Q4
Read Intensive Multi Vendor SATA Drives							
P18420-X21	HPE 240GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	438	1.0	400 / 235	124 / 61	44,000 / 16,000	45,000@Q16 / 10,500@Q1
P18422-X21	HPE 480GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	700	0.8	510 / 395	125 / 53	63,000 / 25,000	73,000@Q32 / 25,000@Q1
P18424-X21	HPE 960GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	1,400	0.8	506 / 480	125 / 53	63,000 / 29,000	73,000@Q32 / 29,000@Q4
P18426-X21	HPE 1.92TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	2,800	0.8	519 / 470	125 / 60	55,500 / 24,000	56,000@Q32 / 25,000@Q32
P18428-X21	HPE 3.84TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	5,256	0.8	503 / 480	125 / 65	63,000 / 22,500	72,000@Q32 / 23,000@Q1
P18430-X21	HPE 7.68TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	9,111	0.7	505 / 480	126 / 87	65,000 / 11,500	57,000@Q32 / 10,000@Q1
P40496-B21	HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	438	1.0	400 / 235	124 / 61	44,000 / 16,000	45,000@Q16 / 16,500@Q4
P40497-B21	HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	700	0.8	510 / 395	125 / 53	63,000 / 25,000	73,000@Q32 / 25,000@Q1

Technical Specifications

SATA Interface – (Speeds & Feeds) MULTI VENDOR

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
P40498-B21	HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	1,400	0.8	506 / 480	125 / 53	63,000 / 29,000	73,000@Q32 / 29,000@Q4
P40499-B21	HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	2,400	0.8	519 / 470	125 / 60	55,500 / 24,000	56,000@Q32 / 25,000@Q32
P40500-B21	HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	5,256	0.8	503 / 480	125 / 65	63,000 / 22,500	72,000@Q32 / 23,000@Q1
P40501-B21	HPE 7.68TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	9,111	0.7	505 / 480	126 / 87	65,000 / 11,500	73,000@Q32 / 11,800@Q64
P47807-B21	HPE 480GB SATA 6G Read Intensive LFF SCC Multi Vendor SSD	700	0.8	510 / 395	125 / 53	63,000 / 25,000	73,000@Q32 / 25,000@Q1
P47808-B21	HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD	1,400	0.8	506 / 480	125 / 53	63,000 / 29,000	73,000@Q32 / 29,000@Q4
P47809-B21	HPE 240GB SATA 6G Read Intensive SFF RW Multi Vendor SSD	250	0.80	400 / 235	124 / 70	44,000 / 14,000	45,000@Q16 / 16,500@Q4
P65272-B21	HPE 480GB SATA 6G Read Intensive SFF RW Multi Vendor SSD	876	1.0	515 / 449	111 / 38	68,000 / 29,000	77,000@Q32 / 29,000@Q4



Technical Specifications

SATA Power and Height Specifications MULTI VENDOR

SATA Interface – (Power & Height) MULTI VENDOR

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z-Height
Mixed Use Multi Vendor SATA Drives									
P18432-X21	HPE 480GB SATA 6G Mixed Use SFF SC Multi Vendor SSD	1.50	3.55	3.55	3.56	4.00	2.94	5.00	7mm
P18434-X21	HPE 960GB SATA 6G Mixed Use SFF SC Multi Vendor SSD	1.50	3.90	3.90	3.10	4.10	2.81	5.00	7mm
P18436-X21	HPE 1.92TB SATA 6G Mixed Use SFF SC Multi Vendor SSD	1.50	3.90	3.90	3.20	4.10	3.04	5.00	7mm
P18438-X21	HPE 3.84TB SATA 6G Mixed Use SFF SC Multi Vendor SSD	1.50	4.50	4.50	3.66	4.39	3.17	5.00	7mm
P40502-B21	HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	1.50	3.55	3.55	3.56	4.00	2.94	5.00	7mm
P40503-B21	HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	1.50	3.90	3.90	3.10	4.10	2.81	5.00	7mm
P40504-B21	HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	1.50	3.90	3.90	3.20	4.10	3.04	5.00	7mm
P40505-B21	HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	1.50	4.50	4.50	3.66	4.39	3.17	5.00	7mm
P47419-B21	HPE 960GB SATA 6G Mixed Use LFF SCC Multi Vendor SSD	1.50	3.90	3.90	3.10	4.10	2.81	5.00	7mm
Read Intensive Multi Vendor SATA Drives									
P18420-X21	HPE 240GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	1.50	3.05	3.05	3.00	3.50	2.10	5.00	7mm
P18422-X21	HPE 480GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	1.50	3.50	3.50	3.15	3.75	2.54	5.00	7mm
P18424-X21	HPE 960GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	1.50	4.05	4.05	3.10	4.00	2.66	5.00	7mm
P18426-X21	HPE 1.92TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	1.50	4.10	4.10	3.16	4.00	3.15	5.00	7mm
P18428-X21	HPE 3.84TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	1.50	4.10	4.10	3.56	4.25	3.46	5.00	7mm
P18430-X21	HPE 7.68TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	1.54	2.99	2.99	2.46	3.55	2.99	3.55	7mm
P40496-B21	HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	1.50	3.05	3.05	3.00	3.50	2.10	5.00	7mm
P40497-B21	HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	1.50	3.50	3.50	3.15	3.75	2.54	5.00	7mm



Technical Specifications

SATA Interface – (Power & Height) MULTI VENDOR

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z-Height
P40498-B21	HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	1.50	4.05	4.05	3.10	4.00	2.66	5.00	7mm
P40499-B21	HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	1.50	4.10	4.10	3.16	4.00	3.15	5.00	7mm
P40500-B21	HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	1.50	4.10	4.10	3.56	4.25	3.46	5.00	7mm
P40501-B21	HPE 7.68TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	1.54	2.99	2.99	2.46	3.55	2.99	3.55	7mm
P47807-B21	HPE 480GB SATA 6G Read Intensive LFF SCC Multi Vendor SSD	1.50	3.50	3.50	3.15	3.75	2.54	5.00	7mm
P47808-B21	HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD	1.50	4.05	4.05	3.10	4.00	2.66	5.00	7mm
P65272-B21	HPE 480GB SATA 6G Read Intensive SFF RW Multi Vendor SSD	1.50	3.50	3.50	3.15	3.75	2.45	5.00	7mm

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.
- Multi-vendor SKUs are composed of numerous vendor manufactured SSDs within a given SATA capacity SKU. When ordering a particular SKU-B21 number the customer will receive a homogenous set of vendor manufactured SSDs in that capacity that has met or exceeds the HPE qualification standards published above.

SATA Certifications MULTI VENDOR

- Prequalified certification will be listed in the HPE Selector Tool <http://ssd.hpe.com/>.
- For latest VMware Compatibility, please visit <https://www.vmware.com/resources/compatibility/search.php> and enter specific HPE Model Number to confirm compatibility.
- For latest Windows OS Certification and SDDC (Software Defined Data Center) Premium AQ Certification please visit <https://www.windowsservercatalog.com/> and enter specific HPE Model Number to confirm compatibility.



Technical Specifications

SAS Capacity, Workload, Carrier Specifications

SAS Interface – (Capacity, Workload, Carrier...)

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed Firmware (DS)	Flash Type	Port	Server Gen Supported (Select Platforms)
Write Intensive SAS Drives											
Mixed Use SAS Drives											
P49046-B21	HPE 800GB SAS 12G Mixed Use SFF SC Multi Vendor SSD	800	MU	SAS	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10,10 Plus
P49048-B21	HPE 1.6TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	1,600	MU	SAS	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10,10 Plus
P49052-B21	HPE 3.2TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	3,200	MU	SAS	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10,10 Plus
P49056-B21	HPE 6.4TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	6,400	MU	SAS	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10,10 Plus
P49047-B21	HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD	800	MU	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P49049-B21	HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	1,600	MU	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P49053-B21	HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	3,200	MU	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P49057-B21	HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	6,400	MU	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
Mixed Use SAS Self-Encrypting Drives (SED)											
P41400-B21	HPE 800GB SAS 24G Mixed Use SFF BC Self-encrypting FIPS PM6 SSD	800	MU	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P41401-B21	HPE 1.6TB SAS 24G Mixed Use SFF BC Self-encrypting FIPS PM6 SSD	1,600	MU	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P63871-B21	HPE 1.6TB SAS Mixed Use SFF BC Self-encrypting FIPS 140-3 PM7 SSD	1,600	MU	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus,11
Read Intensive SAS Drives											
P49028-B21	HPE 960GB SAS 12G Read Intensive SFF SC Multi Vendor SSD	960	RI	SAS	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10,10 Plus
P49030-B21	HPE 1.92TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	1,920	RI	SAS	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10,10 Plus
P49034-B21	HPE 3.84TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	3,840	RI	SAS	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10,10 Plus
P49039-B21	HPE 7.68TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	7,680	RI	SAS	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10,10 Plus



Technical Specifications

SAS Interface – (Capacity, Workload, Carrier...)

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed Firmware (DS)	Flash Type	Port	Server Gen Supported (Select Platforms)
P49044-B21	HPE 15.36TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	15,360	RI	SAS	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10,10 Plus
P49029-B21	HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	960	RI	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P49031-B21	HPE 1.92TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	1,920	RI	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P49035-B21	HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	3,840	RI	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P49041-B21	HPE 7.68TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	7,680	RI	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P49045-B21	HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	15,360	RI	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus

Read Intensive SAS Self-Encrypting Drives (SED)

P41398-B21	HPE 3.84TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD	3,840	RI	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P41399-B21	HPE 7.68TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD	7,680	RI	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P63875-B21	HPE 3.84TB SAS Read Intensive SFF BC Self-encrypting FIPS 140-3 PM7 SSD	3,840	RI	SAS	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus,11

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.

SAS Speeds and Feeds Specifications

SAS Interface – (Speeds & Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
--------------------	------------------	----------------------	----------------	---	---	---	--

Write Intensive SAS Drives



Technical Specifications

SAS Interface – (Speeds & Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DDPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
Mixed Use SAS Drives							
P49046-B21	HPE 800GB SAS 12G Mixed Use SFF SC Multi Vendor SSD	4,380	3	1,080 / 1,000	165 / 95	115,000 / 100,000	174,000@Q64 / 100,000@Q16
P49048-B21	HPE 1.6TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	8,760	3	1,080 / 1,030	185 / 95	115,000 / 120,000	173,000@Q64 / 120,000@Q16
P49052-B21	HPE 3.2TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	17,121	3	1,080 / 1,030	165 / 95	110,000 / 120,000	173,000@Q64 / 130,000@Q16
P49056-B21	HPE 6.4TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	34,241	3	1,080 / 1,030	195 / 95	105,000 / 120,000	173,000@Q64 / 130,000@Q16
P49047-B21	HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD	4,380	3	1,090 / 1,040	94 / 34	150,000 / 135,000	174,000@Q64 / 120,000@Q16
P49049-B21	HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	8,760	3	2,030 / 1,950	90 / 27	150,000 / 165,000	155,000@Q64 / 165,000@Q16
P49053-B21	HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	17,121	3	2,030 / 1,950	97 / 29	145,000 / 160,000	155,000@Q64 / 160,000@Q16
P49057-B21	HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	32,241	3	1,080 / 1,035	108 / 32	135,000 / 125,000	173,000@Q64 / 130,000@Q16
Mixed Use SAS Self-Encrypting Drives (SED)							
P41400-B21	HPE 800GB SAS 24G Mixed Use SFF BC Self-encrypting FIPS PM6 SSD	4,380	3.00	1,080 / 1,035	95 / 32	150,000 / 125,000	173,000@Q64 / 130,000@Q4
P41401-B21	HPE 1.6TB SAS 24G Mixed Use SFF BC Self-encrypting FIPS PM6 SSD	8,760	3.00	1,080 / 1,035	100 / 32	145,000 / 125,000	173,000@Q64 / 130,000@Q16
P63871-B21	HPE 1.6TB SAS Mixed Use SFF BC Self-encrypting FIPS 140-3 PM7 SSD	8,760	3.00	2,047 / 2,046	78 / 23	184,642 / 317,376	308,406@Q64 / 325,959@Q128
Read Intensive SAS Drives							
P49028-B21	HPE 960GB SAS 12G Read Intensive SFF SC Multi Vendor SSD	1,712	1	1,080 / 1,030	180 / 96	115,000 / 46,000	173,000@Q64 / 46,000@Q4
P49030-B21	HPE 1.92TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	3,424	1	1,080 / 1,030	190 / 95	115,000 / 70,000	173,000@Q64 / 70,000@Q32
P49034-B21	HPE 3.84TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	6,848	1	1,080 / 1,030	175 / 95	110,000 / 78,000	173,000@Q64 / 78,000@Q4
P49039-B21	HPE 7.68TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	13,697	1	1,080 / 1,030	190 / 95	105,000 / 55,000	173,000@Q64 / 56,000@Q4
P49044-B21	HPE 15.36TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	27,393	1	1,080 / 1,030	185 / 95	100,000 / 63,000	173,000@Q64 / 64,000@Q16

Technical Specifications

SAS Interface – (Speeds & Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DDPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
P49029-B21	HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	1,712	1	2,030 / 1,280	90 / 26	155,000 / 65,000	174,000@Q64 / 65,000@Q4
P49031-B21	HPE 1.92TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	3,424	1	2,030 / 1,950	90 / 29	150,000 / 100,000	155,000@Q32 / 100,000@Q4
P49035-B21	HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	7,008	1	2,030 / 1,950	97 / 27	145,000 / 114,000	155,000@Q32 / 100,000@Q4
P49041-B21	HPE 7.68TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	14,016	1	2,030 / 1,950	97 / 29	145,000 / 140,000	155,000@Q64 / 140,000@Q16
P49045-B21	HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	27,393	1	2,030 / 1,950	97 / 26	150,000 / 140,000	174,000@Q64 / 145,000@Q16

Read Intensive SAS Self-Encrypting Drives (SED)

P41398-B21	HPE 3.84TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD	7,008	1.00	1,080 / 1,035	108 / 32	135,000 / 78,000	173,000@Q64 / 78,000@Q4
P41399-B21	HPE 7.68TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD	14,016	1.00	1,080 / 1,035	108 / 32	135,000 / 55,000	173,000@Q64 / 56,000@Q4
P63875-B21	HPE 3.84TB SAS Read Intensive SFF BC Self-encrypting FIPS 140-3 PM7 SSD	7,008	1.00	2,047 / 2,037	77 / 23	186,622 / 159,779	308,508@Q64 / 160,497@Q128

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.

SAS Interface – (Power & Height)

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
Write Intensive SAS Drives									
Mixed Use SAS Drives									
P49046-B21	HPE 800GB SAS 12G Mixed Use SFF SC Multi Vendor SSD	3.89	6.47	6.47	8.28	8.56	6.47	8.56	15mm



Technical Specifications

SAS Interface – (Power & Height)

HPE Option Kit SKU	Long Description	Power Idle (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z-Height
P49048-B21	HPE 1.6TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	3.83	6.59	6.59	6.55	9.60	6.59	9.60	15mm
P49052-B21	HPE 3.2TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	3.74	6.95	6.95	6.60	10.16	6.95	10.16	15mm
P49056-B21	HPE 6.4TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	3.69	7.63	7.63	7.70	9.82	7.63	9.82	15mm
P49047-B21	HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD	4.66	6.47	6.47	8.28	8.56	6.47	8.56	15mm
P49049-B21	HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	6.11	8.00	8.00	8.84	13.61	8.00	13.61	15mm
P49053-B21	HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	6.27	8.56	8.56	9.00	16.89	8.56	16.89	15mm
P49057-B21	HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	6.12	8.77	8.77	10.49	17.64	8.77	17.64	15mm

Mixed Use SAS Self-Encrypting Drives (SED)

P41400-B21	HPE 800GB SAS 24G Mixed Use SFF BC Self-encrypting FIPS PM6 SSD	2.91	6.47	6.47	8.28	8.56	6.47	8.56	15mm
P41401-B21	HPE 1.6TB SAS 24G Mixed Use SFF BC Self-encrypting FIPS PM6 SSD	3.07	6.92	6.92	8.84	12.50	6.92	12.50	15mm
P63871-B21	HPE 1.6TB SAS Mixed Use SFF BC Self-encrypting FIPS 140-3 PM7 SSD	5.00	10.56	13.80	9.75	14.99	14.80	16.00	15mm

Read Intensive SAS Drives

P49028-B21	HPE 960GB SAS 12G Read Intensive SFF SC Multi Vendor SSD	3.67	6.68	6.68	6.76	8.35	6.68	8.35	15mm
P49030-B21	HPE 1.92TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	3.69	6.74	6.74	6.47	9.57	6.74	9.57	15mm
P49034-B21	HPE 3.84TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	3.42	7.00	7.00	6.63	9.19	7.00	9.19	15mm
P49039-B21	HPE 7.68TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	4.04	7.92	7.92	7.36	10.26	7.92	10.26	15mm
P49044-B21	HPE 15.36TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	4.18	8.67	8.67	7.97	9.88	8.67	9.88	15mm
P49029-B21	HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	6.19	7.81	7.81	8.42	10.34	7.81	10.34	15mm



Technical Specifications

SAS Interface – (Power & Height)

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
P49031-B21	HPE 1.92TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	6.17	7.96	7.96	8.64	13.66	7.96	13.66	15mm
P49035-B21	HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	6.33	8.94	8.94	9.00	16.82	8.94	16.82	15mm
P49041-B21	HPE 7.68TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	6.10	8.90	8.90	10.10	17.29	8.90	17.29	15mm
P49045-B21	HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	6.64	8.94	8.94	12.40	17.62	8.94	17.62	15mm

Read Intensive SAS Self-Encrypting Drives (SED)

P41398-B21	HPE 3.84TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD	3.04	7.34	7.34	8.68	12.63	7.34	12.63	15mm
P41399-B21	HPE 7.68TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD	3.25	8.26	8.26	10.10	17.29	8.26	17.29	15mm
P63875-B21	HPE 3.84TB SAS Read Intensive SFF BC Self-encrypting FIPS 140-3 PM7 SSD	5.00	11.22	15.48	11.47	16.02	16.20	18.00	15mm

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.

SAS Certifications

- Prequalified certification will be listed in the HPE Selector Tool <http://ssd.hpe.com/>.
- For latest VMware Compatibility, please visit <https://www.vmware.com/resources/compatibility/search.php> and enter specific HPE Model Number to confirm compatibility.
- For latest Windows OS Certification and SDDC (Software Defined Data Center) Premium AQ Certification please visit <https://www.windowsservercatalog.com/> and enter specific HPE Model Number to confirm compatibility.



Technical Specifications

Value SAS Capacity, Workload, Carrier Specifications MULTI VENDOR

Value SAS Interface– (Capacity, Workload, Carrier...) MULTI VENDOR

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed Firmware (DS)	Flash Type	Port	Server Gen Supported (Select Platforms)
Mixed Use Multi Vendor Value SAS Drives											
P37005-B21	HPE 960GB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	960	MU	Value SAS	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P37009-B21	HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS Multi Vendor SSD	960	MU	Value SAS	LFF	Hot Plug	LPC	Yes	TLC	Single	Gen10,10 Plus
P37011-B21	HPE 1.92TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	1,920	MU	Value SAS	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P37013-B21	HPE 1.92TB SAS 12G Mixed Use LFF SCC Value SAS Multi Vendor SSD	1,920	MU	Value SAS	LFF	Hot Plug	SCC	Yes	TLC	Single	Gen10
P37017-B21	HPE 3.84TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	3,840	MU	Value SAS	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P40510-B21	HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	960	MU	Value SAS	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40511-B21	HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	1,920	MU	Value SAS	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40512-B21	HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	3,840	MU	Value SAS	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
Read Intensive Multi Vendor Value SAS Drives											
P36997-B21	HPE 960GB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	960	RI	Value SAS	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P36999-B21	HPE 1.92TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	1,920	RI	Value SAS	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P37001-B21	HPE 3.84TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	1,920	RI	Value SAS	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P37003-B21	HPE 7.68TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	7,680	RI	Value SAS	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P40506-B21	HPE 960GB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	960	RI	Value SAS	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11



Technical Specifications

Value SAS Interface– (Capacity, Workload, Carrier...) MULTI VENDOR

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed Firmware (DS)	Flash Type	Port	Server Gen Supported (Select Platforms)
Read Intensive Multi Vendor Value SAS Drives											
P40507-B21	HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	1,920	RI	Value SAS	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40508-B21	HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	3,840	RI	Value SAS	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P40509-B21	HPE 7.68TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	7,680	RI	Value SAS	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.
- Multi-vendor SKUs are composed of numerous vendor manufactured SSDs within a given SATA capacity SKU. When ordering a particular SKU-B21 number the customer will receive a homogenous set of vendor manufactured SSDs in that capacity that has met or exceeds the HPE qualification standards published above.



Technical Specifications

Value SAS Speeds and Feeds Specifications MULTI VENDOR

Value SAS Interface – (Speeds & Feeds) MULTI VENDOR							
HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
Mixed Use Multi Vendor Value SAS Drives							
P37005-B21	HPE 960GB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	5,200	3.0	820 / 650	122 / 34	105,000 / 42,322	160,000@Q64 / 42,322@Q16
P37009-B21	HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS Multi Vendor SSD	5,200	3.0	820 / 650	122 / 34	105,000 / 42,322	160,000@Q64 / 51,000@Q32
P37011-B21	HPE 1.92TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	10,000	3.0	820 / 650	134 / 38	96,000 / 51,000	160,000@Q64 / 51,000@Q256
P37013-B21	HPE 1.92TB SAS 12G Mixed Use LFF SCC Value SAS Multi Vendor SSD	10,000	3.0	820 / 650	134 / 38	96,000 / 51,000	160,000@Q64 / 51,000@Q256
P37017-B21	HPE 3.84TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	21,000	3.0	820 / 650	129 / 34	105,000 / 51,000	160,000@Q32 / 51,000@Q256
P40510-B21	HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	5,200	3.0	790 / 635	130 / 35	105,000 / 42,322	155,000@Q32 / 42,322@Q16
P40511-B21	HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	10,000	3.0	820 / 635	140 / 38	96,000 / 51,000	155,000@Q32 / 51,000@Q256
P40512-B21	HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	21,000	3.0	820 / 650	129 / 34	105,000 / 51,000	160,000@Q32 / 51,000@Q256



Technical Specifications

Read Intensive Multi Vendor Value SAS Drives

P36997-B21	HPE 960GB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	1,700	1.00	820 / 650	121 / 34	105,000 / 41,000	160,000@Q32 / 41,000@Q4
P36999-B21	HPE 1.92TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	3,500	1.00	820 / 620	122 / 34	108,713 / 41,000	160,000@Q64 / 41,000@Q4
P37001-B21	HPE 3.84TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	7,000	1.00	820 / 650	129 / 35	100,000 / 41,000	160,000@Q64 / 42,000@Q128
P37003-B21	HPE 7.68TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	14,000	1.00	820 / 695	129 / 38	108,9550 / 41,550	160,000@Q256 / 41,789@Q16
P40506-B21	HPE 960GB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	1,700	1.00	820 / 650	121 / 34	105,000 / 41,000	160,000@Q32 / 41,000@Q4
P40507-B21	HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	3,500	1.00	820 / 620	122 / 34	108,713 / 41,000	160,000@Q64 / 41,000@Q4

Read Intensive Multi Vendor Value SAS Drives

P40508-B21	HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	7,000	1.00	820 / 650	129 / 35	100,000 / 41,000	160,000@Q64 / 42,000@Q128
P40509-B21	HPE 7.68TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	14,000	1.00	820 / 695	129 / 38	108,9550 / 41,550	160,000@Q256 / 41,789@Q16

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.
- Multi-vendor SKUs are composed of numerous vendor manufactured SSDs within a given SAS capacity SKU. When ordering a particular SKU-B21 number the customer will receive a homogenous set of vendor manufactured SSDs in that capacity that has met or exceeds the HPE qualification standards published above.



Technical Specifications

Value SAS Power and Height Specifications MULTI VENDOR

Value SAS Interface – (Power & Height) MULTI VENDOR									
HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
Mixed Use Multi Vendor Value SAS Drives									
P37005-B21	HPE 960GB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	4.71	5.04	4.95	8.13	5.78	5.04	9.00	15mm
P37009-B21	HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS Multi Vendor SSD	4.71	5.04	4.95	8.13	5.78	5.04	9.00	15mm
P37011-B21	HPE 1.92TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	4.88	6.08	5.35	8.21	6.25	6.08	9.00	15mm
P37013-B21	HPE 1.92TB SAS 12G Mixed Use LFF SCC Value SAS Multi Vendor SSD	4.88	6.08	5.35	8.21	6.25	6.08	9.00	15mm
P37017-B21	HPE 3.84TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	4.99	6.26	5.79	8.23	6.57	6.26	9.00	15mm
P40510-B21	HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	4.71	5.04	4.95	8.13	5.78	5.04	9.00	15mm
P40511-B21	HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	4.88	6.08	5.35	8.21	6.25	6.08	9.00	15mm
P40512-B21	HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	4.99	6.26	5.79	8.23	6.57	6.26	9.00	15mm



Technical Specifications

Value SAS Interface – (Power & Height) MULTI VENDOR

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
Read Intensive Multi Vendor Value SAS Drives									
P36997-B21	HPE 960GB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	4.49	5.10	5.00	7.60	5.98	5.10	9.00	15mm
P36999-B21	HPE 1.92TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	4.60	6.33	5.12	7.66	6.62	6.33	9.00	15mm
P37001-B21	HPE 3.84TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	4.99	6.52	5.79	8.03	7.26	6.52	9.00	15mm
P37003-B21	HPE 7.68TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	4.69	7.69	5.70	8.45	6.91	7.69	9.00	15mm
P40506-B21	HPE 960GB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	4.49	5.10	5.00	7.60	5.98	5.10	9.00	15mm
P40507-B21	HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	4.60	6.33	5.12	7.66	6.62	6.33	9.00	15mm
P40508-B21	HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	4.99	6.52	5.79	8.03	7.26	6.52	9.00	15mm
P40509-B21	HPE 7.68TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	4.69	7.69	5.70	8.45	6.91	7.69	9.00	15mm

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.
- Multi-vendor SKUs are composed of numerous vendor manufactured SSDs within a given SAS capacity SKU. When ordering a particular SKU-B21 number the customer will receive a homogenous set of vendor manufactured SSDs in that capacity that has met or exceeds the HPE qualification standards published above.

Value SAS Certifications MULTI VENDOR

- Prequalified certification will be listed in the HPE Selector Tool <http://ssd.hpe.com/>.
- For latest VMware Compatibility, please visit <https://www.vmware.com/resources/compatibility/search.php> and enter specific HPE Model Number to confirm compatibility.
- For latest Windows OS Certification and SDDC (Software Defined Data Center) Premium AQ Certification please visit <https://www.windowsservercatalog.com/> and enter specific HPE Model Number to confirm compatibility.



Technical Specifications

PCIe/NVMe Capacity, Workload, Carrier Specifications

PCIe/NVMe Interface – SKUs (Capacity, Workload, Carrier...)

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed	Flash Type	Port	Server Gen Supported (Select Platforms)
NVMe High Performance Low Latency SSDs Write Intensive SSDs											
P06952-X21	HPE 750GB NVMe Gen3 High Performance Low Latency Write Intensive SFF SCN U.2 P4800X SSD	750	WI	NVMe	SFF	Hot Plug	SCN	Yes	3D Xpoint	Single	Gen9,10
NVMe High Performance and Mainstream Mixed Use Drives											
P22274-B21	HPE 12.8TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735 SSD	12,800	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Dual	Gen10
P50225-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD	1,600	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Dual	Gen10
P50228-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD	3,200	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Dual	Gen10
P50231-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD	6,400	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Dual	Gen10
P51458-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD	1,600	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10
P51460-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD	3,200	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10
P51462-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD	6,400	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10
P50226-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SC U.3 PM1735a SSD	1,600	MU	NVMe	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10 Plus, 11
P50229-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SC U.3 PM1735a SSD	3,200	MU	NVMe	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10 Plus
P50232-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SC U.3 PM1735a SSD	6,400	MU	NVMe	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10 Plus
P50227-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	1,600	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus, 11
P50230-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	3,200	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P50233-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	6,400	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus, 11



Technical Specifications

PCIe/NVMe Interface – SKUs (Capacity, Workload, Carrier...)

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed	Flash Type	Port	Server Gen Supported (Select Platforms)
P51459-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	1,600	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P51461-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	3,200	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P51463-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	6,400	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P63845-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	1,600	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus, 11
P63849-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	3,200	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus, 11
P63853-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	6,400	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus, 11
P47837-B21	HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	800	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P47834-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static Multi Vendor SSD	1,600	MU	NVMe	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P47835-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static Multi Vendor SSD	3,200	MU	NVMe	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P47838-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	1,600	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P47839-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	3,200	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P47840-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	6,400	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P47820-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD	1,600	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10,10 Plus
P47821-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD	3,200	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10,10 Plus
P47822-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD	6,400	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10,10 Plus



Technical Specifications

PCIe/NVMe Interface – SKUs (Capacity, Workload, Carrier...)

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed	Flash Type	Port	Server Gen Supported (Select Platforms)
P64999-B21	HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	800	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P65003-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static V2 Multi Vendor SSD	1,600	MU	NVMe	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10 Plus
P65007-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	1,600	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P65011-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static V2 Multi Vendor SSD	3,200	MU	NVMe	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10 Plus
P65015-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	3,200	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P65023-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	6,400	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P64870-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD	1,600	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10
P64878-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD	3,200	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10
P64886-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD	6,400	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10

NVMe High Performance Mixed Use Self-Encrypting Drives (SED)

P44588-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN Self-encrypting FIPS U.3 CM6 SSD	1,600	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Dual	Gen10,10 Plus
P44596-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN Self-encrypting FIPS U.3 CM6 SSD	3,200	MU	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Dual	Gen10,10 Plus
P44584-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SC Self-encrypting FIPS U.3 CM6 SSD	1,600	MU	NVMe	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10 Plus
P44592-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SC Self-encrypting FIPS U.3 CM6 SSD	3,200	MU	NVMe	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10 Plus
P41404-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	1,600	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus



Technical Specifications

PCIe/NVMe Interface – SKUs (Capacity, Workload, Carrier...)											
HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed	Flash Type	Port	Server Gen Supported (Select Platforms)
P41405-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	3,200	MU	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
NVMe High Performance and Mainstream Read Intensive Drives											
P50214-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD	1,920	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Dual	Gen10
P50217-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD	3,840	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Dual	Gen10
P50220-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD	7,680	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Dual	Gen10
P51452-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD	1,920	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10
P51454-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD	3,840	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10
P51456-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD	7,680	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10
P50215-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SC U.3 PM1733a SSD	1,920	RI	NVMe	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10 Plus
P50218-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SC U.3 PM1733a SSD	3,840	RI	NVMe	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10 Plus
P50221-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SC U.3 PM1733a SSD	7,680	RI	NVMe	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10 Plus
P50216-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	1,920	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P50219-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	3,840	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P50222-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	7,680	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P50224-B21	HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	15,360	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P51453-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	1,920	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus



Technical Specifications

PCIe/NVMe Interface – SKUs (Capacity, Workload, Carrier...)

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed	Flash Type	Port	Server Gen Supported (Select Platforms)
P51455-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	3,840	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P51457-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	7,680	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P63829-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	1,920	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus,11
P63833-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	3,840	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus,11
P63837-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	7,680	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus,11
P63841-B21	HPE 15.3TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	15,360	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus,11
P47842-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 Static Multi Vendor SSD	3,840	RI	NVMe	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10,10 Plus
P47844-B21	HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	960	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P47845-B21	HPE 1.9TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	1,920	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P47846-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	3,840	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P47847-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	7,680	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus
P47823-B21	HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD	1,920	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10,10 Plus
P47824-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD	3,840	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10,10 Plus
P47825-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD	7,680	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10,10 Plus
P64842-B21	HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	960	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11

Technical Specifications

PCIe/NVMe Interface – SKUs (Capacity, Workload, Carrier...)

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed	Flash Type	Port	Server Gen Supported (Select Platforms)
P64844-B21	HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	1,920	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P64845-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 Static V2 Multi Vendor SSD	3,840	RI	NVMe	SFF	Hot Plug	SC	Yes	TLC	Single	Gen10 Plus, 11
P64846-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	3,84	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P64848-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	7,680	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Single	Gen10 Plus, 11
P64874-B21	HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD	1,920	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10,10 Plus
P64882-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD	3,840	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10,10 Plus
P64890-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD	7,680	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Single	Gen10,10 Plus

NVMe High Performance Read Intensive Self-Encrypting Drives (SED)

P44572-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN Self-encrypting FIPS U.3 CM6 SSD	1,920	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Dual	Gen10,10 Plus
P44580-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN Self-encrypting FIPS U.3 CM6 SSD	3,840	RI	NVMe	SFF	Hot Plug	SCN	Yes	TLC	Dual	Gen10,10 Plus
P44568-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SC Self-encrypting FIPS U.3 CM6 SSD	1,920	RI	NVMe	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10 Plus
P44576-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SC Self-encrypting FIPS U.3 CM6 SSD	3,840	RI	NVMe	SFF	Hot Plug	SC	Yes	TLC	Dual	Gen10 Plus
P41402-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	1,920	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus
P41403-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	3,840	RI	NVMe	SFF	Hot Plug	BC	Yes	TLC	Dual	Gen10 Plus



Technical Specifications

PCIe/NVMe Speeds and Feeds Specifications

PCIe/NVMe Interface – SKUs (Speeds and Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
NVMe High Performance Low Latency SSDs Write Intensive SSDs							
P06952-X21	HPE 750GB NVMe Gen3 High Performance Low Latency Write Intensive SFF SCN U.2 P4800X SSD	41,000	30.00	2,500 / 2,300	17 / 17	575,000 / 585,000	575,000@Q16 / 585,000@Q16
NVMe High Performance and Mainstream Mixed Use Drives							
P22274-B21	HPE 12.8TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735 SSD	68,484	3.00	7,000 / 3,800	95 / 30	175,000 / 265,000	960,000@Q256 / 280,000@Q128
P50225-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD	8,760	3.00	7,100 / 2,500	70 / 19	220,000 / 270,000	1,250,000@256 / 280,000@64
P50228-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD	17,520	3.00	7,100 / 4,200	70 / 19	225,000 / 310,000	1,350,000@Q256 / 320,000@Q64
P50231-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD	35,040	3.00	7,100 / 4,200	79 / 19	200,000 / 310,000	1,350,000@Q256 / 320,000@Q64
P50226-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SC U.3 PM1735a SSD	8,760	3.00	7,100 / 2,500	70 / 19	220,000 / 270,000	1,250,000@Q256 / 280,000@Q64
P50229-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SC U.3 PM1735a SSD	17,520	3.00	7,100 / 4,200	70 / 19	225,000 / 310,000	1,350,000@Q256 / 320,000@Q64
P50232-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SC U.3 PM1735a SSD	35,040	3.00	7,100 / 4,200	79 / 19	200,000 / 310,000	1,350,000@Q256 / 320,000@Q64
P50227-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	8,760	3.00	7,100 / 2,500	70 / 19	220,000 / 270,000	1,250,000@Q256 / 280,000@Q64
P50230-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	17,520	3.00	7,100 / 4,200	70 / 19	225,000 / 310,000	1,350,000@Q256 / 320,000@Q64
P50233-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	35,040	3.00	7,100 / 4,200	79 / 19	200,000 / 310,000	1,350,000@Q256 / 320,000@Q64
P51458-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD	8,700	3.00	5,200 / 1,950	65 / 15	200,000 / 215,000	725,000@Q256 / 220,000@Q16
P51459-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	8,700	3.00	5,200 / 1,950	65 / 15	200,000 / 215,000	725,000@Q256 / 220,000@Q16
P51460-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD	17,500	3.00	6,500 / 3,600	65 / 15	215,000 / 355,000	885,000@Q256 / 370,000@Q16



Technical Specifications

PCIe/NVMe Interface – SKUs (Speeds and Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency μ Sec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
P51461-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	17,500	3.00	6,500 / 3,600	65 / 15	215,000 / 355,000	885,000@Q256 / 370,000@Q16
P51462-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD	35,000	3.00	7,000 / 4,200	65 / 15	220,000 / 340,000	885,000@Q256 / 420,000@Q16
P51463-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	35,000	3.00	7,000 / 4,200	65 / 15	220,000 / 340,000	885,000@Q256 / 420,000@Q16
P63845-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	8,760	3.00	7,155 / 3,409	67 / 11	221,887 / 318,295	1,242,113Q128 / 318,187@Q16
P63849-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	17,520	3.00	7,118 / 6,818	67 / 11	225,305 / 582,238	1,334,274@Q256 / 654,401@Q256
P63853-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	35,040	3.00	7,117 / 6,831	67 / 11	226,351 / 538,037	1,286,234@Q256 / 592,261@Q32
P47837-B21	HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	4,280	3.00	5,500 / 1,300	100 / 28	160,000 / 92,000	700,000@Q256 / 9,000@Q4
P47834-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static Multi Vendor SSD	8,561	3.00	5,500 / 1,150	105 / 25	155,000 / 87,000	700,000@Q256 / 85,000@Q32
P47838-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	8,561	3.00	5,500 / 1,150	105 / 25	155,000 / 87,000	700,000@Q256 / 85,000@Q32
P47835-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static Multi Vendor SSD	17,121	3.00	5,900 / 2,300	105 / 25	155,000 / 170,000	900,000@Q256 / 170,000@Q4
P47839-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	17,121	3.00	5,900 / 2,300	105 / 25	155,000 / 170,000	900,000@Q256 / 75,000@Q4
P47840-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	34,242	3.00	5,900 / 3,650	110 / 25	155,000 / 250,000	900,000@Q256 / 250,000@Q16
P47820-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD	8,561	3.00	5,500 / 1,150	105 / 25	155,000 / 87,000	700,000@Q256 / 85,000@Q32
P47821-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD	17,121	3.00	5,900 / 2,300	105 / 25	155,000 / 170,000	900,000@Q256 / 170,000@Q4
P47822-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD	34,242	3.00	5,900 / 3,650	110 / 25	155,000 / 250,000	900,000@Q256 / 250,000@Q16

Technical Specifications

PCIe/NVMe Interface – SKUs (Speeds and Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency μ Sec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
P64999-B21	HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	4,380	3.0	6,200 / 1,383	72 / 16	189,142 / 158,900	543,727@256 / 159,907@4
P65003-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static V2 Multi Vendor SSD	8,760	3.0	6,200 / 2,731	72 / 16	202,668 / 283,846	812,698@256 / 283,568@16
P65007-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	8,760	3.0	6,200 / 2,731	72 / 16	202,668 / 283,846	812,698@256 / 283,568@16
P65011-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static V2 Multi Vendor SSD	17,520	3.0	6,200 / 4,300	73 / 16	209,431 / 382,266	930,000@Q256 / 390,000@16
P65015-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	17,520	3.0	6,200 / 4,300	73 / 16	209,431 / 382,266	930,000@Q256 / 390,000@16
P65023-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	35,040	3.0	6,200 / 4,300	73 / 16	211,802 / 394,003	950,000@Q256 / 408,171@16
P64870-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD	8,760	3.0	6,200 / 2,731	72 / 16	202,668 / 283,846	812,698@256 / 283,568@16
P64878-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD	17,520	3.0	6,200 / 4,300	73 / 16	209,431 / 382,266	930,000@Q256 / 390,000@16
P64886-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD	35,040	3.0	6,200 / 4,300	73 / 16	211,802 / 394,003	950,000@Q256 / 408,171@16

NVMe High Performance Mixed Use Self-Encrypting Drives (SED)

P44588-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN Self-encrypting FIPS U.3 CM6 SSD	8,760	3.00	6,500 / 2,700	93 / 25	180,000 / 220,000	950,000@Q256 / 75,000@Q4
P44596-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN Self-encrypting FIPS U.3 CM6 SSD	17,520	3.00	6,500 / 4,000	93 / 24	180,000 / 350,000	950,000@Q256 / 75,000@Q4
P44584-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SC Self-encrypting FIPS U.3 CM6 SSD	8,760	3.00	6,500 / 2,700	93 / 25	180,000 / 220,000	950,000@Q256 / 75,000@Q4
P44592-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SC Self-encrypting FIPS U.3 CM6 SSD	17,520	3.00	6,500 / 4,000	93 / 24	180,000 / 350,000	950,000@Q256 / 75,000@Q4
P41404-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	8,760	3.00	6,500 / 2,700	93 / 25	180,000 / 220,000	950,000@Q256 / 75,000@Q4
P41405-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	17,520	3.00	6,500 / 4,000	93 / 24	180,000 / 350,000	950,000@Q256 / 75,000@Q4



Technical Specifications

PCIe/NVMe Interface – SKUs (Speeds and Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency μ Sec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
NVMe High Performance and Mainstream Read Intensive Drives							
P50214-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD	3,504	1.00	7,100 / 2,500	70 / 19	220,000 / 125,000	1,250,000@Q256 / 130,000@Q4
P50217-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD	7,008	1.00	7,100 / 4,200	70 / 19	225,000 / 140,000	1,350,000@Q256 / 170,000@Q4
P50220-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD	14,016	1.00	7,100 / 4,200	79 / 19	200,000 / 175,000	1,350,000@Q256 / 180,000@Q4
P50215-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SC U.3 PM1733a SSD	3,504	1.00	7,100 / 2,500	70 / 19	220,000 / 125,000	1,250,000@Q256 / 130,000@Q4
P50218-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SC U.3 PM1733a SSD	7,008	1.00	7,100 / 4,200	70 / 19	225,000 / 140,000	1,350,000@Q256 / 170,000@Q4
P50221-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SC U.3 PM1733a SSD	14,016	1.00	7,100 / 4,200	79 / 19	200,000 / 175,000	1,350,000@Q256 / 180,000@Q4
P50216-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	3,504	1.00	7,100 / 2,500	70 / 19	220,000 / 125,000	1,250,000@Q256 / 130,000@Q4
P50219-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	7,008	1.00	7,100 / 4,200	70 / 19	225,000 / 140,000	1,350,000@Q256 / 170,000@Q4
P50222-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	14,016	1.00	7,100 / 4,200	79 / 19	200,000 / 175,000	1,350,000@Q256 / 180,000@Q4
P50224-B21	HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	28,032	1.00	7,100 / 4,200	79 / 19	200,000 / 175,000	1,350,000@Q256 / 185,000@Q4
P51452-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD	3,500	1.00	5,200 / 1,950	65 / 15	200,000 / 120,000	713,000@Q256 / 123,000@Q4
P51453-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	3,500	1.00	5,200 / 1,950	65 / 15	200,000 / 120,000	713,000@Q256 / 123,000@Q4
P51454-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD	7,000	1.00	6,500 / 3,600	65 / 15	215,000 / 205,000	850,000@Q256 / 210,000@Q16
P51455-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	7,000	1.00	6,500 / 3,600	65 / 15	215,000 / 205,000	850,000@Q256 / 210,000@Q16
P51456-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD	14,000	1.00	7,000 / 4,200	65 / 15	220,000 / 230,000	850,000@Q256 / 235,000@Q16

Technical Specifications

PCIe/NVMe Interface – SKUs (Speeds and Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency (4KiB, Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
P51457-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	14,000	1.00	7,000 / 4,200	65 / 15	220,000 / 230,000	850,000@Q256 / 235,000@Q16
P63829-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	3,504	1.00	7,160 / 3,421	67 / 11	222,075 / 161,441	1,198,665@Q256 / 161,460Q4
P63833-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	7,008	1.00	7,151 / 6,813	67 / 11	225,439 / 307,155	1,207,140@Q256 / 332,212@Q32
P63837-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	14,016	1.00	7,165 / 6,831	67 / 11	225,888 / 298,739	1,202,924@Q128 / 316,613@Q32
P63841-B21	HPE 15.3TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	28,032	1.00	7,162 / 6,832	67 / 11	227,113 / 312,673	1,225,944@Q128 / 326,121@Q32
P47844-B21	HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	1,712	1.00	5,500 / 1,300	101 / 32	160,000 / 30,000	520,000@Q256 / 30,000@Q64
P47845-B21	HPE 1.9TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	3,424	1.00	5,500 / 1,150	105 / 33	155,000 / 30,000	700,000@Q256 / 30,000@Q256
P47842-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 Static Multi Vendor SSD	6,848	1.00	5,900 / 2,300	105 / 29	155,000 / 60,000	880,000@Q256 / 60,000@Q64
P47846-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	6,848	1.00	5,900 / 2,300	105 / 29	155,000 / 60,000	880,000@Q256 / 60,000@Q64
P47847-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	13,697	1.00	5,900 / 3,650	107 / 29	155,000 / 85,000	880,000@Q256 / 85,000@Q128
P47823-B21	HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD	3,424	1.00	5,500 / 1,150	105 / 33	155,000 / 30,000	700,000@Q256 / 30,000@Q256
P47824-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD	6,848	1.00	5,900 / 2,300	105 / 29	155,000 / 60,000	880,000@Q256 / 60,000@Q64
P47825-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD	13,697	1.00	5,900 / 3,650	107 / 29	155,000 / 85,000	880,000@Q256 / 85,000@Q128



Technical Specifications

PCIe/NVMe Interface – SKUs (Speeds and Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
P64842-B21	HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	1,752	1.0	6,200 / 1,395	72 / 17	189,027 / 71,425	543,737@256 / 71,429@Q4
P64844-B21	HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	3,504	1.0	6,200 / 2,681	73 / 17	202,698 / 133,123	811,976@256 / 133,753@4
P64845-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 Static V2 Multi Vendor SSD	7,008	1.0	6,200 / 3,969	72 / 17	209,990 / 180,000	984,200@256 / 180,000@4
P64846-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	7,008	1.0	6,200 / 3,969	72 / 17	209,990 / 180,000	984,200@256 / 180,000@4
P64848-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	14,016	1.0	6,200 / 3,870	76 / 17	196,951 / 190,000	950,000@Q256 / 190,000@4
P64874-B21	HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD	3,504	1.0	6,200 / 3,350	73 / 16	202,698 / 133,123	811,976@256 / 133,753@4
P64882-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD	7,008	1.0	6,200 / 4,300	72 / 15	209,990 / 180,000	984,200@256 / 180,000@4
P64890-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD	14,016	1.0	6,200 / 4,300	72 / 16	212,824 / 190,000	950,000@Q256 / 190,000@4

NVMe High Performance Read Intensive Self-Encrypting Drives (SED)

P44572-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN Self-encrypting FIPS U.3 CM6 SSD	3,504	1.00	6,500 / 2,700	93 / 25	180,000 / 100,000	950,000@Q256 / 75,000@Q4
P44580-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN Self-encrypting FIPS U.3 CM6 SSD	7,008	1.00	6,500 / 4,000	93 / 26	180,000 / 170,000	930,000@Q256 / 75,000@Q4
P44568-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SC Self-encrypting FIPS U.3 CM6 SSD	3,504	1.00	6,500 / 2,700	93 / 25	180,000 / 100,000	950,000@Q256 / 75,000@Q4
P44576-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SC Self-encrypting FIPS U.3 CM6 SSD	7,008	1.00	6,500 / 4,000	93 / 26	180,000 / 170,000	930,000@Q256 / 75,000@Q4



Technical Specifications

PCIe/NVMe Interface – SKUs (Speeds and Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
P41402-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	3,504	1.00	6,500 / 2,700	93 / 25	180,000 / 100,000	950,000@Q256 / 75,000@Q4
P41403-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	7,008	1.00	6,500 / 4,000	93 / 26	180,000 / 170,000	930,000@Q256 / 75,000@Q4

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.



Technical Specifications

PCIe/NVMe Power & Height Specifications

PCIe/NVMe Interface – (Power & Height)									
HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
NVMe High Performance Low Latency SSDsWrite Intensive SSDs									
P06952-X21	HPE 750GB NVMe Gen3 High Performance Low Latency Write Intensive SFF SCN U.2 P4800X SSD	4.50	9.74	9.74	9.12	14.04	9.74	14.04	15mm
NVMe High Performance and Mainstream Mixed Use Drives									
P22274-B21	HPE 12.8TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735 SSD	5.20	15.80	15.80	16.30	18.50	15.80	18.50	15mm
P50225-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD	4.40	15.10	14.10	13.90	14.20	13.50	15.10	15mm
P50228-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD	4.60	17.10	15.10	14.60	18.40	15.80	18.40	15mm
P50231-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD	4.20	17.60	15.30	14.80	18.70	15.50	18.70	15mm
P51458-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD	4.08	9.42	9.42	9.26	9.64	9.42	9.64	15mm
P51460-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD	4.13	11.17	11.17	10.57	13.55	11.17	13.55	15mm
P51462-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD	4.25	11.68	11.68	11.7	15.52	11.68	15.52	15mm
P50226-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SC U.3 PM1735a SSD	4.40	15.10	14.10	13.90	14.20	13.50	15.10	15mm
P50229-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SC U.3 PM1735a SSD	4.60	17.10	15.10	14.60	18.40	15.80	18.40	15mm
P50232-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SC U.3 PM1735a SSD	4.20	17.60	15.30	14.80	18.70	15.50	18.70	15mm
P50227-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	4.40	15.10	14.10	13.90	14.20	13.50	15.10	15mm
P50230-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	4.60	17.10	15.10	14.60	18.40	15.80	18.40	15mm



Technical Specifications

PCIe/NVMe Interface – (Power & Height)									
HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
P50233-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	4.20	17.60	15.30	14.80	18.70	15.50	18.70	15mm
P51459-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	4.08	9.42	9.42	9.26	9.64	9.42	9.64	15mm
P51461-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	4.13	11.17	11.17	10.57	13.55	11.17	13.55	15mm
P51463-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	4.25	11.68	11.68	11.7	15.52	11.68	15.52	15mm
P63845-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	3.41	15.60	12.66	12.94	13.28	13.22	18.00	15 mm
P63849-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	3.53	16.58	18.80	13.60	20.18	18.04	22.00	15 mm
P63853-B21	HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	3.61	17.76	19.18	14.17	21.90	19.57	24.00	15 mm
P47837-B21	HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	6.00	11.30	9.80	12.20	9.70	10.30	12.20	15mm
P47834-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static Multi Vendor SSD	6.30	11.90	10.75	11.80	10.92	10.50	11.90	15mm
P47838-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	6.30	11.90	10.75	11.80	10.92	10.50	11.90	15mm
P47835-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static Multi Vendor SSD	6.30	14.60	13.40	13.40	13.60	12.40	14.60	15mm
P47839-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	6.30	14.60	13.40	13.40	13.60	12.40	14.60	15mm
P47840-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	6.30	17.40	16.80	15.30	18.60	14.70	18.60	15mm



Technical Specifications

PCIe/NVMe Interface – (Power & Height)

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
P47820-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD	6.30	11.90	10.75	11.80	10.92	10.50	11.90	15mm
P47821-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD	6.30	14.60	13.40	13.40	13.60	12.40	14.60	15mm
P47822-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD	6.30	17.40	16.80	15.30	18.60	14.70	18.60	15mm
P64999-B21	HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	5.00	10.06	8.28	10.64	8.70	8.35	13.00	15mm
P65003-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static V2 Multi Vendor SSD	5.00	11.94	11.58	10.96	11.75	10.62	16.00	15mm
P65007-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	5.00	11.94	11.58	10.96	11.75	10.62	16.00	15mm
P65011-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static V2 Multi Vendor SSD	5.00	12.65	12.38	11.31	14.80	11.79	17.00	15mm
P65015-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	5.00	12.65	12.38	11.31	14.80	11.79	17.00	15mm
P65023-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	5.00	12.75	14.32	12.10	17.92	13.55	21.00	15mm
P64870-B21	HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD	5.00	8.69	8.69	10.00	11.18	8.69	14.00	15mm
P64878-B21	HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD	5.00	10.56	10.56	10.82	14.80	10.56	15.00	15mm



Technical Specifications

PCIe/NVMe Interface – (Power & Height)									
HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
P64886-B21	HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD	5.00	11.50	12.10	12.10	15.28	11.70	15.28	15mm
NVMe High Performance Mixed Use Self-Encrypting Drives (SED)									
P44588-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN Self-encrypting FIPS U.3 CM6 SSD	4.70	15.10	12.80	14.00	14.10	11.50	15.10	15mm
P44596-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN Self-encrypting FIPS U.3 CM6 SSD	4.70	18.20	16.70	15.70	18.20	15.00	18.20	15mm
P44584-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SC Self-encrypting FIPS U.3 CM6 SSD	4.70	15.10	12.80	14.00	14.10	11.50	15.10	15mm
P44592-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SC Self-encrypting FIPS U.3 CM6 SSD	4.70	18.20	16.70	15.70	18.20	15.00	18.20	15mm
P41404-B21	HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	4.70	15.10	12.80	14.00	14.10	11.50	15.10	15mm
P41405-B21	HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	4.70	18.20	16.70	15.70	18.20	15.00	18.20	15mm
NVMe High Performance and Mainstream Read Intensive Drives									
P50214-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD	4.30	15.10	14.10	13.90	14.20	13.50	15.10	15mm
P50217-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD	4.20	17.30	16.20	14.50	18.70	16.60	18.70	15mm
P50220-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD	4.30	17.80	16.20	14.90	19.00	16.60	19.00	15mm
P51452-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD	4.08	9.07	9.07	9.26	9.64	9.07	9.64	15mm
P51454-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD	4.01	11.46	11.46	10.45	13.39	11.46	13.39	15mm
P51456-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD	4.23	13.10	13.10	11.70	15.52	13.10	15.52	15mm
P50215-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SC U.3 PM1733a SSD	4.30	15.10	14.10	13.90	14.20	13.50	15.10	15mm



Technical Specifications

PCIe/NVMe Interface – (Power & Height)

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
P50218-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SC U.3 PM1733a SSD	4.20	17.30	16.20	14.50	18.70	16.60	18.70	15mm
P50221-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SC U.3 PM1733a SSD	4.30	17.80	16.20	14.90	19.00	16.60	19.00	15mm
P50216-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	4.30	15.10	14.10	13.90	14.20	13.50	15.10	15mm
P50219-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	4.20	17.30	16.20	14.50	18.70	16.60	18.70	15mm
P50222-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	4.30	17.80	16.20	14.90	19.00	16.60	19.00	15mm
P50224-B21	HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	4.30	18.60	16.80	16.60	20.00	16.90	20.00	15mm
P51453-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	4.08	9.07	9.07	9.26	9.64	9.07	9.64	15mm
P51455-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	4.01	11.46	11.46	10.45	13.39	11.46	13.39	15mm
P51457-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	4.23	13.10	13.10	11.70	15.52	13.10	15.52	15mm
P63829-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	3.60	15.53	12.54	13.02	13.49	12.80	18.00	15 mm
P63833-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	3.71	16.79	18.37	13.74	20.16	17.88	22.00	15 mm
P63837-B21	HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	3.62	17.53	19.69	14.14	21.68	19.58	24.00	15 mm
P63841-B21	HPE 15.3TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	3.97	18.78	20.94	15.02	22.61	20.33	25.00	15 mm
P47844-B21	HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	6.00	11.30	9.70	12.20	9.70	10.20	12.20	15mm
P47845-B21	HPE 1.9TB NVMe Gen4 Mainstream Performance Read	6.30	11.90	10.75	11.80	11.18	10.30	11.90	15mm



Technical Specifications

PCIe/NVMe Interface – (Power & Height)

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
	Intensive SFF BC U.3 Static Multi Vendor SSD								
P47842-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 Static Multi Vendor SSD	6.30	14.60	13.20	13.40	14.80	12.80	14.80	15mm
P47846-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	6.30	14.60	13.20	13.40	14.80	12.80	14.80	15mm
P47847-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	6.30	17.40	17.10	15.30	18.60	16.00	18.60	15mm
P47823-B21	HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD	6.30	11.90	10.75	11.80	11.18	10.30	11.90	15mm
P47824-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD	6.30	14.60	13.20	13.40	14.80	12.80	14.80	15mm
P47825-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD	6.30	17.40	17.10	15.30	18.60	16.00	18.60	15mm
P64842-B21	HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	5.00	8.96	8.00	9.60	8.42	8.50	13.00	15mm
P64844-B21	HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	5.00	9.50	11.28	10.00	11.33	10.25	16.00	15mm
P64845-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 Static V2 Multi Vendor SSD	5.00	10.56	13.00	10.82	14.80	11.48	17.00	15mm
P64846-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	5.00	10.56	13.00	10.82	14.80	11.48	17.00	15mm
P64848-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	5.00	11.50	13.96	12.10	15.28	13.25	21.00	15mm



Technical Specifications

PCIe/NVMe Interface – (Power & Height)

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
P64874-B21	HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD	5.00	8.69	8.69	10.00	11.18	8.69	11.18	15mm
P64882-B21	HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD	5.00	10.56	10.56	10.82	14.80	10.56	14.80	15mm
P64890-B21	HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD	5.00	11.50	12.10	12.10	15.28	11.70	15.28	15mm

NVMe High Performance Read Intensive Self-Encrypting Drives (SED)

P44572-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN Self-encrypting FIPS U.3 CM6 SSD	4.70	15.10	11.60	14.00	14.10	12.20	15.10	15mm
P44580-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN Self-encrypting FIPS U.3 CM6 SSD	4.70	17.90	15.30	15.70	18.20	14.60	18.20	15mm
P44568-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SC Self-encrypting FIPS U.3 CM6 SSD	4.70	15.10	11.60	14.00	14.10	12.20	15.10	15mm
P44576-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SC Self-encrypting FIPS U.3 CM6 SSD	4.70	17.90	15.30	15.70	18.20	14.60	18.20	15mm
P41402-B21	HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	4.70	15.10	11.60	14.00	14.10	12.20	15.10	15mm
P41403-B21	HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	4.70	17.90	15.30	15.70	18.20	14.60	18.20	15mm

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.



Technical Specifications

NVMe Certifications

- Prequalified certification will be listed in the HPE Selector Tool <http://ssd.hpe.com/>.
- For latest VMware Compatibility, please visit <https://www.vmware.com/resources/compatibility/search.php> and enter specific HPE Model Number to confirm compatibility.
- For latest Windows OS Certification and SDDC (Software Defined Data Center) Premium AQ Certification please visit <https://www.windowsservercatalog.com/> and enter specific HPE Model Number to confirm compatibility.

PCIe/NVMe EDSFF E3.S Capacity, Workload, Carrier Specifications

PCIe/NVMe EDSFF E3.S – SKUs (Capacity, Workload, Carrier...)												
HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed	Flash Type	Port	Server Gen Supported (Select Platforms)	
NVMe Main Performance Read Intensive EDSFF E3.S SSDs												
P56585-B21	HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	1,920	RI	NVMe	E3.S	Hot Plug	EC1	Yes	TLC	Single	Gen11	
P56586-B21	HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	3,840	RI	NVMe	E3.S	Hot Plug	EC1	Yes	TLC	Single	Gen11	
P56587-B21	HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	7,680	RI	NVMe	E3.S	Hot Plug	EC1	Yes	TLC	Single	Gen11	
NVMe High Performance Mixed Use EDSFF E3.S SSDs												
P61191-B21	HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	3,200	MU	NVMe	E3.S	Hot Plug	EC1	Yes	TLC	Single	Gen11	
P61195-B21	HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	6,400	MU	NVMe	E3.S	Hot Plug	EC1	Yes	TLC	Single	Gen11	
NVMe High Performance Read Intensive EDSFF E3.S SSDs												
P57799-B21	HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	3,840	RI	NVMe	E3.S	Hot Plug	EC1	Yes	TLC	Single	Gen11	
P57803-B21	HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	7,680	RI	NVMe	E3.S	Hot Plug	EC1	Yes	TLC	Single	Gen11	
P57807-B21	HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	15,360	RI	NVMe	E3.S	Hot Plug	EC1	Yes	TLC	Single	Gen11	
P61179-B21	HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	3,840	RI	NVMe	E3.S	Hot Plug	EC1	Yes	TLC	Single	Gen11	
P61183-B21	HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	7,680	RI	NVMe	E3.S	Hot Plug	EC1	Yes	TLC	Single	Gen11	
P61187-B21	HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	15,360	RI	NVMe	E3.S	Hot Plug	EC1	Yes	TLC	Single	Gen11	



Technical Specifications

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.

PCIe/NVMe EDSFF E3.S Speeds and Feeds Specifications

PCIe/NVMe EDSFF E3.S – SKUs (Speeds and Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DDPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
NVMe Main Performance Read Intensive EDSFF E3.S SSDs							
P56585-B21	HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	3,504	1	6,217 / 3,476	78 / 18	193,409 / 182,910	1,051,716@Q256 / 183,541@Q16
P56586-B21	HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	7,008	1	6,240 / 3,096	81 / 18	187,417 / 178,362	1,037,742@Q256 / 179,305@Q16
P56587-B21	HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	14,016	1	6,022 / 5,407	81 / 19	190,379 / 176,033	1,032,244@Q256 / 175,089@Q16
NVMe High Performance Mixed Use EDSFF E3.S SSDs							
P61191-B21	HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	17,520	3	13,852 / 6,802	70 / 15	215,995 / 599,050	1,159,100@Q128 / 649,489@Q16
P61195-B21	HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	35,040	3	13,852 / 6,864	70 / 15	216,271 / 527,456	1,199,553@Q128 / 574,490@Q16
NVMe High Performance Read Intensive EDSFF E3.S SSDs							
P57799-B21	HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	7,008	1	13,821 / 5,850	73 / 19	220,626 / 288,895	1,040,714@Q128 / 290,896@Q16
P57803-B21	HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	14,016	1	13,378 / 5,841	82 / 19	196,587 / 312,346	1,068,434@Q128 / 314,755@Q16
P57807-B21	HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	28,032	1	13,800 / 7,276	82 / 19	197,931 / 359,542	1,060,146@Q128 / 363,570@Q16
P61179-B21	HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	7,008	1	13,852 / 6,868	70 / 15	215,993 / 325,008	1,202,413@Q128 / 342,962@Q16
P61183-B21	HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	14,016	1	13,852 / 6,860	70 / 14	215,951 / 302,927	1,175,981@Q128 / 321,298@Q16
P61187-B21	HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	28,032	1	12,520 / 5,337	92 / 14	165,451 / 273,611	1,174,204@Q128 / 276,715@Q16

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.

Technical Specifications

PCIe/NVMe EDSFF E3.S Power & Height Specifications

PCIe/NVMe EDSFF E3.S – (Power & Height)

HPE Option Kit SKU	Long Description	Power Idle Time	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z-Height
NVMe Main Performance Read Intensive EDSFF E3.S SSDs									
P56585-B21	HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	5.0	12.80	12.92	12.40	12.73	12.29	25	7.5mm
P56586-B21	HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	5.0	12.99	12.96	12.44	12.63	12.18	25	7.5mm
P56587-B21	HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	5.0	13.98	15.30	13.45	18.40	14.72	25	7.5mm
NVMe High Performance Mixed Use EDSFF E3.S SSDs									
P61191-B21	HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	4.05	22.14	19.74	19.57	20.73	18.97	24	7.5mm
P61195-B21	HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	4.13	23.65	20.52	22.31	23.24	21.26	24	7.5mm
NVMe High Performance Read Intensive EDSFF E3.S SSDs									
P57799-B21	HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF PM1743 SSD	4.4	22.3	20.8	19.9	21.0	18.7	22.3	7.7mm
P57803-B21	HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF PM1743 SSD	4.5	22.6	20.7	20.4	21.2	19.0	22.6	7.7mm
P57807-B21	HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF PM1743 SSD	4.9	23.5	22.5	20.9	24.6	21.1	24.6	7.7mm
P61179-B21	HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	4.03	22.26	19.6	19.61	20.71	19.04	24	7.5mm
P61183-B21	HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	4.07	23.62	21.51	22.15	23.36	21.26	24	7.5mm
P61187-B21	HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	4.41	24.38	23.21	23.32	23.75	22.23	25	7.5mm

Notes:

B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.

1. Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.



Technical Specifications

NVMe EDSFF E3.S Certifications

- Prequalified certification will be listed in the HPE Selector Tool <http://ssd.hpe.com/>.
- For latest VMware Compatibility, please visit <https://www.vmware.com/resources/compatibility/search.php> and enter specific HPE Model Number to confirm compatibility.
- For latest Windows OS Certification and SDDC (Software Defined Data Center) Premium AQ Certification please visit <https://www.windowsservercatalog.com/> and enter specific HPE Model Number to confirm compatibility.

M.2 Enablement Kits Capacity, Workload, Carrier Specifications

M.2 Enablement Kits – (Capacity, Workload, Carrier...)

HPE Option KIT SKU	Long Description	Capacity	Workload	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed	Flash Type	Server Gen Supported (Select
878783-X21	HPE Universal SATA 6G AIC HHHL M.2 SSD Enablement Kit	N/A	N/A	SATA	M.2e	Non Hot Plug	N/A	Yes	N/A	Gen9,10

Notes:

- 878783-X21 enablement Kit is an Add-In-Card, for installation inside of the server, that can be configured to be either Single or Dual with choice of any SATA 2280 M.2 in the HPE M.2 portfolio. See SATA M.2s in Tables above.
- Speeds and Feeds information should be taken from the M.2 drives used within the enablement kits. See SATA M.2s in tables above and below.
- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.

M.2 Enablement Kits Speeds and Feeds Specifications

SATA Interface – (Speeds & Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput (MiB/s)	Random Read Avg. / Random Write Avg. Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
878783-X21	HPE Universal SATA 6G AIC HHHL M.2 SSD Enablement Kit	N/A	N/A	N/A	N/A	N/A	N/A

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.



Technical Specifications

M.2 Enablement Kits Power and Height Specifications

M.2 Enablement Kits – (Power & Height)

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
878783-X21	HPE Universal SATA 6G AIC HHHL M.2 SSD Enablement Kit	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Half Height/ Half Length

Notes:

- Power information should be taken from the M.2 drives used within the enablement kits. See SATA M.2s in tables above and below.
- 878783-X21 enablement Kit is an Add-In-Card, for installation inside of the server, that can be configured to be either Single or Dual with choice of any SATA 2280 M.2 in the HPE M.2 portfolio. See SATA M.2s in Tables above and below.
- Speeds and Feeds information should be taken from the M.2 drives used within the enablement kits. See SATA M.2s in tables above and below.
- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.

M.2 Enablement Kits Certifications

Prequalified certification will be listed in the HPE Selector Tool <http://ssd.hpe.com/>.

For latest VMware Compatibility, please visit <https://www.vmware.com/resources/compatibility/search.php> and enter specific HPE Model Number to confirm compatibility.

For latest Windows OS Certification and SDDC (Software Defined Data Center) Premium AQ Certification please visit <https://www.windowsservercatalog.com/> and enter specific HPE Model Number to confirm compatibility.

M.2 Capacity, Workload, Carrier Specifications

M.2s– (Capacity, Workload, Carrier...)

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed Firmware (DS)	Flash Type	Server Gen Supported (Select Platforms)
Read Intensive SATA M.2s										
P47817-B21	HPE 240GB SATA 6G Read Intensive M.2 Multi Vendor SSD	240	RI	SATA	M.2	Non Hot Plug	N/A	Yes	TLC	Gen10,10 Plus
P47818-B21	HPE 480GB SATA 6G Read Intensive M.2 Multi Vendor SSD	480	RI	SATA	M.2	Non Hot Plug	N/A	Yes	TLC	Gen10,10 Plus, 11



Technical Specifications

M.2 Speeds and Feeds Specifications

M.2s– (Speeds & Feeds)

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes	Throughput Random Read Avg. / Random Write Avg.	Latency uSec (4KiB,Q1)	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
Read Intensive SATA M.2s								
P47817-B21	HPE 240GB SATA 6G Read Intensive M.2 Multi Vendor SSD	438	1.00	375 / 210	125 / 85		43,000 / 11,500	44,500@Q32 / 11,800@Q16
P47818-B21	HPE 480GB SATA 6G Read Intensive M.2 Multi Vendor SSD	1,324	1.50	510 / 400	125 / 45		64,000 / 38,000	74,500@Q632 / 39,500@Q256

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.

M.2 Power and Height Specifications

M.2s– (Power & Height)

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
Read Intensive SATA M.2s									
P47817-B21	HPE 240GB SATA 6G Read Intensive M.2 Multi Vendor SSD	1.20	3.05	3.05	2.4	3.40	2.15	3.40	2280 M.2
P47818-B21	HPE 480GB SATA 6G Read Intensive M.2 Multi Vendor SSD	1.20	4.00	4.00	2.75	4.10	2.30	4.10	2280 M.2

Notes: B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.

M.2s Certifications

- Prequalified certification will be listed in the HPE Selector Tool <http://ssd.hpe.com/>.
- For latest VMware Compatibility, please visit <https://www.vmware.com/resources/compatibility/search.php> and enter specific HPE Model Number to confirm compatibility.
- For latest Windows OS Certification and SDDC (Software Defined Data Center) Premium AQ Certification please visit <https://www.windowsservercatalog.com/> and enter specific HPE Model Number to confirm compatibility.

M.2 Capacity, Workload, Carrier Specifications MULTI VENDOR

M.2s– (Capacity, Workload, Carrier...) MULTI VENDOR



Technical Specifications

HPE Option Kit SKU	Long Description	Capacity	Workload Type	Interface Type	Form Factor	Plug Type	Carrier Type	Digitally Signed Firmware (DS)	Flash Type	Server Gen Supported (Select Platforms)
P40513-B21	HPE 480GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	480	RI	NVMe	M.2	Non Hot Plug	N/A	Yes	TLC	Gen10,10 Plus, 11
P40514-B21	HPE 960GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	960	RI	NVMe	M.2	Non Hot Plug	N/A	Yes	TLC	Gen10,10 Plus, 11
P40515-B21	HPE 1.92TB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	1,920	RI	NVMe	M.2	Non Hot Plug	N/A	Yes	TLC	Gen10,10 Plus, 11

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Multi-vendor SKUs are composed of numerous vendor manufactured SSDs within a given Nvme M.2 capacity SKU. When ordering a particular SKU-B21 number the customer will receive a homogenous set of vendor manufactured SSDs in that capacity that has met or exceeds the HPE qualification standards published above.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.

M.2 Speeds and Feeds Specifications MULTI VENDOR

M.2s– (Speeds & Feeds) MULTI VENDOR

HPE Option Kit SKU	Long Description	Lifetime Writes (TB)	Endurance DWPD	MAX Seq Reads / Max Seq Writes Throughput	Random Read Avg. / Random Write Avg. Latency uSec	Random Read / Random Writes IOPS (4KiB, Q=16)	MAX Random Read / MAX Random Write IOPS (4KiB)
P40513-B21	HPE 480GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	876	1.0	1,500/ 380	80 / 50	106,393 / 20,000	135,000@Q256 / 20,000@Q256
P40514-B21	HPE 960GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	1,752	1.0	4,900 / 1,350	80 / 17	170,000 / 88,000	535,000@Q256 / 88,000@4
P40515-B21	HPE 1.92TB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	3,504	1.0	4,900 / 2,400	80 / 17	185,000 / 130,000	740,000@Q256 / 130,000@4

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Multi-vendor SKUs are composed of numerous vendor manufactured SSDs within a given Nvme M.2 capacity SKU. When ordering a particular SKU-B21 number the customer will receive a homogenous set of vendor manufactured SSDs in that capacity that has met or exceeds the HPE qualification standards published above.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.



Technical Specifications

M.2 Power and Height Specifications MULTI VENDOR

M.2s- (Power & Height) MULTI VENDOR

HPE Option Kit SKU	Long Description	Power Idle Time (Watts)	Power Random Read (Watts)	Power Random Write (Watts)	Power Sequential Read (Watts)	Power Sequential Write (Watts)	Power Random R/W (Watts)	Power MAX (Watts)	z- Height
P40513-B21	HPE 480GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	2.90	4.50	4.50	7.10	4.50	4.50	7.10	2280 M.2
P40514-B21	HPE 960GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	2.90	6.00	5.50	7.30	5.50	6.00	7.30	2280 M.2
P40515-B21	HPE 1.92TB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	2.90	6.50	6.90	7.80	7.80	6.90	7.80	22110 M.2

Notes:

- B21 SKU suffix may be replaced with -H21 and/or -K21 to support across different server family lines.
- Multi-vendor SKUs are composed of numerous vendor manufactured SSDs within a given Nvme M.2 capacity SKU. When ordering a particular SKU-B21 number the customer will receive a homogenous set of vendor manufactured SSDs in that capacity that has met or exceeds the HPE qualification standards published above.
- Please use HPE Selector Tool <http://ssd.hpe.com/> to determine server compatibility.

M.2s Certifications MULTI VENDOR

- Prequalified certification will be listed in the HPE Selector Tool <http://ssd.hpe.com/>.
- For latest VMware Compatibility, please visit <https://www.vmware.com/resources/compatibility/search.php> and enter specific HPE Model Number to confirm compatibility.
- For latest Windows OS Certification and SDDC (Software Defined Data Center) Premium AQ Certification please visit <https://www.windowsservercatalog.com/> and enter specific HPE Model Number to confirm compatibility.

Carrier Key Decoder

HPE Solid State Drives (SSDs) utilize a wide variety of carriers, which houses the SSD and also enables a specific chassis fit to support a broad range of HPE server and storage products.

The table below summarizes the various form factors, plug types, and carrier attributes.



Technical Specifications

SATA/SAS - SFF/LFF - SSD					
Form Factor	Smart or	Hot Plug or	Carrier Name (Abbreviation)	Carrier Abbreviation	Size/Form Factor
	Non-Smart	Non-Hot Plug			
SFF Carrier (2.5")	Smart	Hot Plug	Smart Carrier (SC)	SC	SFF
	Non-Smart		Basic Carrier (BC)	BC	SFF
LFF Carrier (3.5")	Smart	Hot Plug	Smart Carrier Converter (SCC)	SCC	LFF
	Non-Smart		Low Profile Converter (LPC)	LPC	LFF
No Carrier	Non-Smart	Non-Hot Plug	Raw No Carrier (RW)	RW	SFF/LFF
NVMe - SFF/AIC SSD					
Form Factor	Smart or	Hot Plug or	Carrier Name (Abbreviation)	Carrier Abbreviation	Size/Form Factor
	Non-Smart	Non-Hot Plug			
SFF Carrier (2.5")	Smart	Hot Plug	Smart Carrier NVMe (SCN)	SCN	SFF
			Smart Carrier (SC)	SC	SFF
	Non-Smart	Non-Hot Plug	Basic Carrier (BC)	BC	SFF
			Raw No Carrier (RW)	RW	SFF
NVMe Add-in-Card	Non-Smart	Non-Hot Plug	NVMe Add-in-Card (AIC)	AIC	HHHL
SATA/NVMe - M.2 & Enablement Kits					
Form Factor	Smart or	Hot Plug or	Carrier Name (Abbreviation)	Carrier Abbreviation	Size/Form Factor
	Non-Smart	Non-Hot Plug			
SATA M.2 2280	Smart	Hot Plug	Smart Carrier M.2 (SCM)	SCM	SFF
	Non-Smart	Non-Hot Plug	Raw Standalone M.2 (N/A)	N/A	M.2
			Universal AIC Card + SATA M.2 (AIC)	AIC	HHHL
NVMe M.2 22110	Non-Smart	Non-Hot Plug	Raw Standalone M.2 (N/A)	N/A	M.2
NVMe - EDSFF SSD					
EDSFF E3.S	Smart	Hot Plug	E3.S 1T Thin Carrier (EC1)	EC1	E3.S
EDSFF E3.S	Smart	Hot Plug	E3.S 2T Thick Carrier (EC2)	EC2	E3.S

Previous To Current Workload Naming Conversion

Please use the table below for comparing older SSD models to the newer workload descriptions.

Previous Workload	Current Workload Alignment
(HE) High Endurance	(WI) Write Intensive (>25 DWPD)
(ME) Mainstream Endurance	(WI) Write Intensive (>25 DWPD)
(LE) Light Endurance	(MU) Mixed Use (>1 & <10 DWPD)
(VE) Value Endurance	(RI) Read Intensive (<=1 DWPD)

SAS, SATA, NVMe SSD SKU Decoders

The following charts are provided to assist in decoding the SSD short & long product descriptions; additional details can also be found within the Carrier Key Decoder & the Previous To Current Workload Naming Conversion tables within this document. Please contact product management for any questions.



Technical Specifications

HPE 960GB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD

Brand	Storage Capacity	Interface Type/ Interface Speed	Endurance *	Form Factor Type / Size	Carriers	Special Features *	Vendor Model Name	Drive Type
HPE	240-960GB 1.6-30.7TB	SATA/SAS 6G/12G/24G NVMe Gen3/Gen4 High Performance Low Latency NVMe Gen3/Gen4 High Performance NVMe Gen3/Gen4 Mainstream Performance	Write Intensive Mixed Use Read Intensive Very Read Optimized	SFF LFF	BC Basic Carrier SC Smart Carrier SCN Smart Carrier NVMe SCM Smart Carrier M.2 SCC Smart Carrier Converter LPC Low Profile Converter RW Raw Drive	U.2 U.3 MV Multi Vendor VS Value SAS SPL Special – Special SKUs SED Self Encrypting Drive FIPS Self Encrypting Drive FIPS <i>In priority order where 1st is closest to Drive Type</i>	Limited to 7 digits Examples: PM1643a PM1735	SSD

SATA/ SAS/ NVMe SSD SKU Decoder Long Name

Notes: If the description exceeds character count

- Abbreviate Special Features starting from lowest priority item
- Drop form factor from the description
- Abbreviate Endurance with the exception Very Read Optimized

HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF PM1743 SSD

Brand	Storage Capacity	Interface Type/ Interface Speed	Endurance *	Form Factor Type / Size	Carriers	Special Features *	Vendor Model Name	Drive Type
HPE	1.6-30.7TB	NVMe Gen5 High Performance NVMe Gen5 Mainstream Performance	Mixed Use Read Intensive Very Read Optimized	E3S	EC1 E3 Thin EC2 E3 Thick	MV Multi Vendor SPL Special – Special SKUs SED Self Encrypting Drive FIPS Self Encrypting Drive FIPS EDSFF Enterprise and Datacenter Standard Form Factor <i>In priority order where 1st is closest to Drive Type</i>	Limited to 7 digits Examples: PM1743 CD7	SSD

NVMe EDSFF E3.S SSD SKU Decoder Long

HPE 1.92TB NVMe Gen3 Mainstream Performance Read Intensive M.2 PE6010 SSD

Brand	Storage Capacity	Interface Type / Interface Speed / Interface Swim lane	Endurance *	Form Factor Type / Size	Special Features *	Vendor Model Name	Drive Type
HPE	240-960GB 1.92-3.84TB	NVMe Gen3/Gen4 Mainstream Performance SATA 6Gb	Mixed Use Read Intensive	M.2	MV Multi Vendor SPL Special – Special SKUs <i>In priority order where 1st is closest to Drive Type</i>	Limited to 7 digits Examples: PE6010 5300B 5300P	SSD

M.2 SSDs SKU Decoder Long Name

Technical Specifications

HPE Dual 240GB SATA 6G Read Intensive M.2 to SFF SCM 5300B SSD Kit

Brand	Storage Capacity	Interface Type/ Interface Speed	Endurance *	Form Factor Type / Form Factor Size	Carriers	Special Features *	Vendor Model Name	Drive Type
HPE	Dual 240GB 480GB 960GB	SATA 6G	Read Intensive	M.2 to SFF	SCM Smart Carrier M.2	MV Multi Vendor SPL Special – Special SKUs <i>In priority order where 1st is closest to Drive Type</i>	Limited to 7 digits Examples: 5300B 5300P	SSD Kit

M.2 SATA SSD Carrier Kits SKU Decoder Long Name

Notes: If the description exceeds character count

- Abbreviate Special Features starting from lowest priority item
- Drop form factor from the description
- Abbreviate Endurance with the exception Very Read Optimized

HPE Universal SATA 6G AIC HHHL M.2 SSD Enablement Kit

Brand	Features	Interface Type/ Interface Speed	Workload	Form Factor Type / Form Factor Size	Drive Type
HPE	Universal	SATA 6G	Read Intensive	AIC HHHL	M.2 SSD Enablement Kit

M.2 SATA SSD Enablement Kits SKU Decoder Long Name

HPE 2x240GB SATA RI M.2 SCM 5300B SSD

Brand	Storage Capacity	Interface Type	Endurance	Form Factor Type *	Carrier	Special Features *	Vendor Model Name *	Drive Type
HPE	2x 240GB 480GB 960GB	SATA	RI	M.2	SCM Smart Carrier M.2	MV Multi Vendor SPL Special – Special SKUs <i>In priority order where 1st is closest to Drive Type</i>	Limited to 7 digits Examples: 5300B 5300P	SSD

M.2 SATA SSD Carrier eKits SKU Decoder Long Name

Notes: If the description exceeds character count

- Drop Form Factor Type
- Drop Special Features starting from lowest priority with the exception of Special SKUs

Technical Specifications

HPE 750GB NVMe Gen3x4 High Performance Low Latency Write Intensive AIC HHHL P4800X SSD

Brand	Storage Capacity	Interface Type / Interface Speed and Lanes / Interface Swim lane	Endurance *	Form Factor Type / Size	Special Features *	Vendor Model	Drive Type
HPE	750	NVMe Gen3/Gen4/ X4/X8 High Performance Low Latency NVMe Gen3/Gen4/ X4/X8 High Performance NVMe Gen3/Gen4/ X4/X8 Mainstream Performance	Write Intensive Mixed Use	AIC HHHL	MV Multi Vendor SPL Special – Special SKUs SED Self Encrypting Drive FIPS Self Encrypting Drive FIPS <i>In priority order where 1st is closest to Drive Type</i>	Limited to 7 characters: Examples: P4800X	SSD

Add-In Card SKU Decoder Long Name

Notes: If the description exceeds character count

- Abbreviate Special Features starting from lowest priority item
- Drop form factor from the description
- Abbreviate Endurance with the exception Very Read Optimized

HPE 750GB NVMe WI HH P4800X SSD

Brand	Storage Capacity	Interface Type and Lanes	Endurance	Form Factor Type / Size *	Special Features *	Vendor Model Name	Drive Type
HPE	750	NVMe	WI MU	HH	MV Multi Vendor SPL Special – Special SKUs SED Self Encrypting Drive FIPS Self Encrypting Drive FIPS <i>In priority order where 1st is closest to Drive Type</i>	Limited to 7 characters: Examples: P4800X	SSD

AIC SKU Decoder Short Name

Notes: If the description exceeds character count

- Drop Form Factor Type
- Drop Special Features starting from lowest priority with the exception of Special SKUs

Environment friendly Products and Approach End-of life Management and Recycling

Hewlett Packard Enterprise offers end-of-life **product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE Directive (2012/19/EU) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the **Hewlett Packard Enterprise web site**. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
08-Jan-2024	Version 57	Changed	Added PM893a and FIPS PM7. Updated NVMe Main U.3ST Power specs
04-Dec-2023	Version 56	Changed	SFF and E3.S CM7 added. Updated SATA/SAS/VSAS/NVMe/M.2 MV Specifications
05-Sep-2023	Version 55	Changed	MV NVMe main V2 added, Consolidate duplicate SATA data
05-Jun-2023	Version 54	Changed	Micron 5400 1.92TB SED added. E3.S VMware restriction removed
03-Apr-2023	Version 53	Changed	Kioxia and Samsung EDSFF E3.S Added
10-Jan-2023	Version 52	Changed	Micron 5400 SED added. Technical Specifications revised and updated
05-Dec-2022	Version 51	Changed	New drive models added. Technical Specifications revised and updated
01-Aug-2022	Version 50	Changed	New drive models added. Technical Specifications revised and updated
05-Jul-2022	Version 49	Changed	New drive models added. Technical Specifications revised and updated
04-Apr-2022	Version 48	Changed	Overview updated. New drive models added. Technical Specifications revised and updated
07-Feb-2022	Version 47	Changed	Technical Specifications section was updated
10-Jan-2022	Version 46	Changed	Technical Specifications section was updated
06-Dec-2021	Version 45	Changed	Technical Specifications section was updated
01-Nov-2021	Version 44	Changed	Technical Specifications section was updated
04-Oct-2021	Version 43	Changed	Technical Specifications section was updated
07-Sep-2021	Version 42	Changed	Technical Specifications section was updated
07-Jun-2021	Version 41	Changed	Tables were fixed and updated
04-May-2021	Version 40	Changed	Technical Specifications section was updated
06-Apr-2021	Version 39	Changed	Tables were fixed and updated
01-Feb-2021	Version 38	Changed	Technical Specifications section was updated
07-Dec-2020	Version 37	Changed	Technical Specifications section was updated
05-Oct-2020	Version 36	Changed	Technical Specifications section was updated
17-Aug-2020	Version 35	Changed	Technical Specifications and Overview Sections were updated
13-Jul-2020	Version 34	Changed	Technical Specifications section was updated
18-May-2020	Version 33	Changed	Tables were fixed and updated
27-Apr-2020	Version 32	Changed	Technical Specifications section was updated
03-Feb-2020	Version 31	Changed	Technical Specifications section was updated
16-Dec-2019	Version 30	Changed	Format Revised
02-Dec-2019	Version 29	Changed	New drive models added. Technical Specifications revised and updated
07-Oct-2019	Version 28	Changed	New drive models added. Technical Specifications revised and updated
05-Aug-2019	Version 27	Changed	Technical Specifications section was updated
01-Jul-2019	Version 26	Changed	Technical Specifications section was updated
03-Jun-2019	Version 25	Changed	New drive models added. Technical Specifications revised and updated
02-Apr-2019	Version 24	Changed	New drive models added. Technical Specifications revised and updated
07-Jan-2019	Version 23	Changed	Technical Specifications section was updated
03-Dec-2018	Version 22	Changed	New drive models added. Technical Specifications revised and updated
15-Oct-2018	Version 21	Changed	Technical Specifications Section was updated
01-Oct-2018	Version 20	Changed	New drive models added. Technical Specifications revised and updated
06-Aug-2018	Version 19	Changed	New drive models added. Technical Specifications revised and updated
02-Jul-2018	Version 18	Changed	Overview and SKU description were updated
04-Jun-2018	Version 17	Changed	New drive models added. Technical Specifications revised and updated
02-Apr-2018	Version 16	Changed	New drive models added, Technical Specifications revised and updated
05-Mar-2018	Version 15	Changed	Technical Specifications revised and updated, images revised
05-Feb-2018	Version 14	Changed	Format Revised New drive models added
04-Dec-2017	Version 13	Changed	New drive model was added Technical Specifications were revised
02-Oct-2017	Version 12	Changed	Technical Specifications were revised
25-Sep-2017	Version 11	Changed	New drive models were added Technical Specifications were revised The title was changed to HPE Solid State Disk Drives (SSD & Add-In Cards)

Summary of Changes

Date	Version History	Action	Description of Change
14-Aug-2017	Version 10	Changed	Technical Specifications were revised
07-Aug-2017	Version 9	Changed	Technical Specifications were revised
17-Jul-2017	Version 8	Changed	Technical Specifications were revised
28-Jun-2017	Version 7	Changed	Technical Specifications were revised
12-Jun-2017	Version 6	Changed	Technical Specifications were revised
06-Jun-2017	Version 5	Changed	Technical Specifications were revised
17-Mar-2017	Version 4	Changed	SSD Selection verbiage was revised
10-Jan-2023	Version 52	Changed	Technical Specifications were revised
10-Mar-2017	Version 3	Changed	Edits to tables and various verbiage
17-Feb-2017	Version 2	Changed	Technical Specifications were revised
13-Feb-2017	Version 1	New	New QuickSpecs



Copyright

Make the right purchase decision.
Contact our presales specialists.

 Chat now (sales)

 Call now

 Get updates



© Copyright 2024 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.
For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

a00001288enw - 15831 - Worldwide - V57 - 08-January-2024